

CLA-D323

Architectural LED Luminaire
DESIGN-FUNCTION-QUALITY

Crystal Lighting Corp.





The CLA-D323 two sizes available, Perfect for Residential Exteriors, Walkways, Perimeters, Recreational Parks, and Any Other location that is looking to refurbish their appearance. The CLA-D323 has a wide light distribution and dark sky compliant. -10 Year 100,000 hour Limited Warranty

FEATURES

- Energy Savings: Over 66%
- Improved lumen maintenance
- Utilizes high efficient Lumiled LED's
- Operating temperatures: -30°C ~ 60°C
- Driver: 120-277v, 50/60Hz,
- 10k Surge protector Standard
- 0-10 Dimming driver, Micro-wave sensors, Photo Cell or Wireless controls(optional)

CONSTRUCTION

- Housing is Heavy-Duty cast aluminum
- 3 Mills Powder Coat Finish.
- Frosted Acrylic Lens (Standard)
- Silicone gasket to prevent leakage and provide weather-tight protection.



Example: CLA-D323-5CLED-30K-MV-BLK-WM-PC

Cat #	Wattage	Color Temp.	Voltage	Finish	Mounting	Options
CLA-D323 Small (CLA-D323S)	5W (5CLED)	3000K (30K)	120-277V (mv)	Matte Black (MBLK)	Post Top 3"OD (PM3)	Button Photocell (PC)
-----	10W (10CLED)	4000K (40K)		Glossy Black (GBLK)	2Cluster Post Top 3"OD (2CPM3)	Opal Acrylic Lens (OAL)
CLA-D323 Large (CLA-D323L)	20W (20CLED)	5000K (50K)		Texture Black (TBLK)	3Cluster Post Top 3"OD (3CPM3)	Micro Wave Sensor (mws)
-----	30W (30CLED)			Texture White (TWHT)	Wall Mount (wm)	
	35W (35CLED)			Silver (SLR)	Pendant Mount Chain (PMC) / 1/2 Stem (pm)	
	40W (40CLED)			Bronze (BRZ)	1ft (PMc1) / (PM1)	
				Graphite (GPH)	2Ft (PMc2) / (PM2)	
				Copper Vein (CPV)	3Ft (PMc3) / (PM3)	
				Silver Vein(SLV)		
				Oil Rubbed Bronze (ORB)		












CLA-D323L-PT

CLA-D323L-WM

CLA-D323S-WM

CLA-D323S-PM

CLA-D323S-3CPM

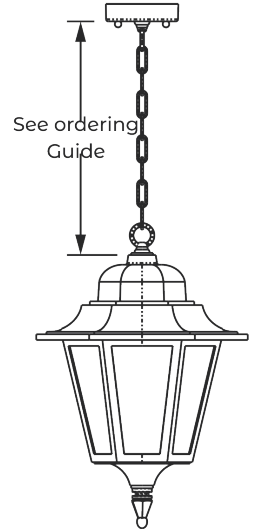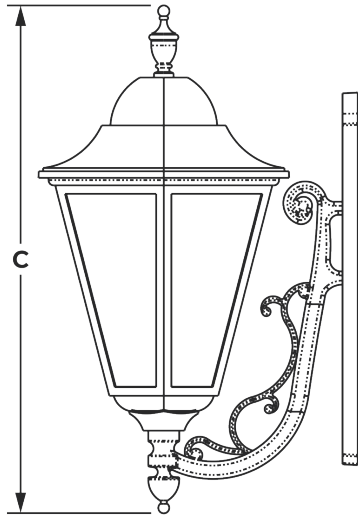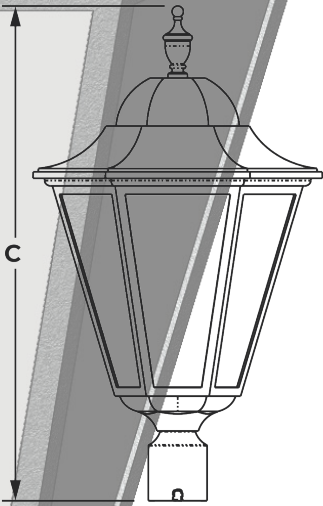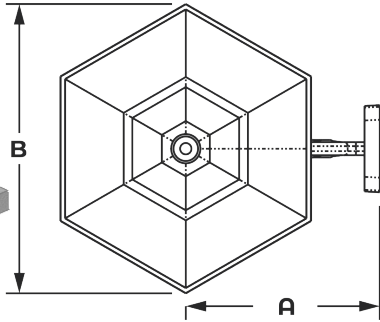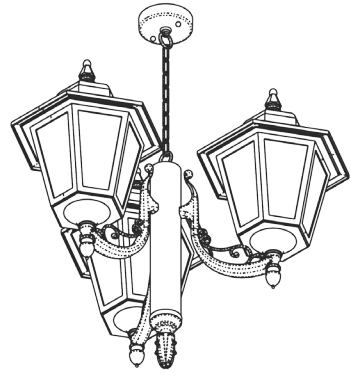

CLA-D323L-PT

CLA-D323L-WM

CLA-D323S-WM

CLA-D323S-PM

Cat#	A	B	C
CLA-D323S	8" 1/2	12" 1/8	18" 7/8
CLA-D323L	11" 1/8	16" 1/2	29" 5/8

Cat #	Input Power	Lumen Output	LPW	Color Temp. (CCT)	CRI	Rated Life (L70)	Input Voltage
CLA-D323S-5CLED	10W	918	183	5000K	70+	>200,000	120-277V
CLA-D323S-10CLED	15W	1,914	191	5000K	70+	>200,000	120-277V
CLA-D323S-20CLED	25W	2,935	183	5000K	70+	>200,000	120-277V
CLA-D323L-30CLED	35W	4,842	146	5000K	70+	>200,000	120-277V
CLA-D323L-35CLED	40W	5,320	161	5000K	70+	>200,000	120-277V
CLA-D323L-40CLED	45W	6,252	152	5000K	70+	>200,000	120-277V

Proudly Manufactured and Assembled in the USA