

CLP-X47

Architectural LED Lighting
DESIGN - QUALITY



Crystal 
Lighting

CLP-X47

Architectural LED Lighting

CLP--X47, has a sophisticated and unique design. It is ideal for illuminating spaces such as: parking areas, entrances, walkways, parks, etc. While suitable for wet locations, this light fixture also offers a wide light distribution.

-10 year / 100,000 hrs. warranty.

FEATURES

- Energy Savings: Over 66% compared to HID light sources
- Improved lumen maintenance
- Utilizes high efficient Lumileds LED's
- Operating temperatures: -30°C ~ 60°C
- 10Kv Surge Protector. (standard)
- Driver: Constant current, 120-277v or 480v (Optional)
- Suitable for wet locations
- 0-10v Dimming, occupancy sensors, photo cell and wireless controls capable (optional)
- Operating Life: >200,000 hours





CONSTRUCTION

- Housing is Heavy-Duty Die-Cast Aluminum & Spun Aluminum materials.
- Powder Coating finish (Standard).
- Clear Polycarbonate Lens (standard).
- Silicone Gasket to prevent leakage and provide IP65 (Weather-Tight Protection).
- Mounting: Over 3" O.D tenon or Pole (Standard) Adapter is required for other mounting sizes.

Example: (CLP-X47-20CLED-T5-30K-MV-3R-BRZ-WC)



CAT#	Wattage	Light Dist.	Color Temp.	Voltage	Mounting (Over)	Finish	Options
CLP-X47	20W (20CLED)	TYPE 2 (T2)	3000K (30K)	120-277V (MV)	3" Fitter (3R)	Black (BLK)	Button Photo Cell (PC) Motion Sensor (OCC) Wireless Control (WC) Frosted Acrylic Lens (FAL)
	40W (40CLED)	TYPE 3 (T3)	4000K (40K)	377V (347) 480V (480)		White (WH)	
	50W (50LED)	TYPE 4 (T4)	5000K (50K)			Bronze (BRZ)	
	60W (60LED)	TYPE 5 (T5)				Gray (GRY)	
	70W (70LED)					Graphite (GPH) Marine Grade (MG)	

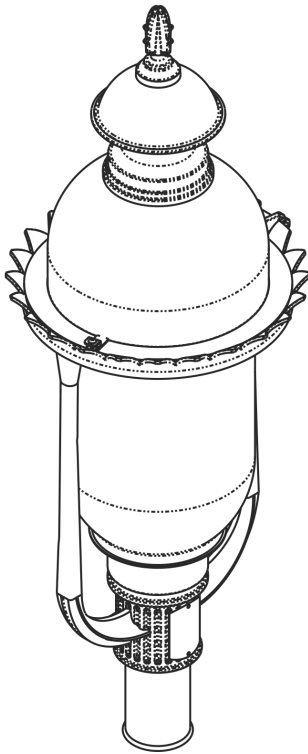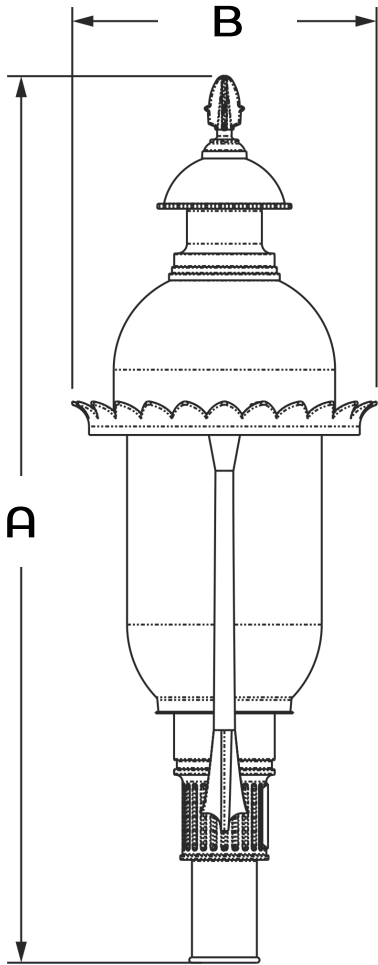

Dimensions			
CAT#	A	B	EPA
CLP-X47	49" 1/2	17"	2.9

CAT #	INPUT POWER	LUMEN OUTPUT	LP/W	COLOR TEMP. (CCT)	CRI	RATED LIFE (L70)	INPUT VOLTAGE	INPUT FREQUENCY	HID Equivalent
CLP-X47-20CLED	25W	3,650	182	5000K	70+	>200,000	120-277V	50/60HZ	100w MH
CLP-X47-40CLED	45W	6,492	162	5000K	70+	>200,000	120-277V	50/60HZ	150w HPS
CLP-X47-50CLED	55W	7,780	155	5000K	70+	>200,000	120-277V	50/60HZ	250w MH
CLP-X47-60CLED	65W	8,539	142	5000K	70+	>200,000	120-277V	50/60HZ	250w PSMH
CLP-X47-70CLED	75W	9,986	142	5000K	70+	>200,000	120-277V	50/60HZ	250w HPS