




# Explosion-proof LED Flexible Strip Light

CES-EX-LP Series

CESP hazardous locations

SHENZHEN CESP CO., LTD  
[www.cespledex.com](http://www.cespledex.com)

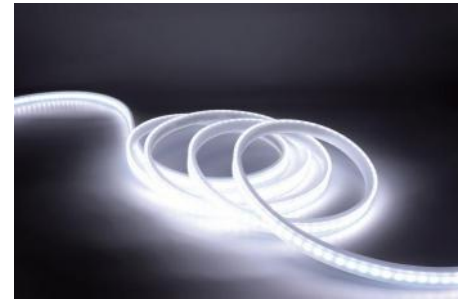

## CES-EX-LP Series

# EXPLOSION-PROOF LED FLEXIBLE STRIP LIGHT

## 1. Functions & Features

### Product description

The CES-EX-LP Series, an innovative line of LED hazardous area lighting products, specifically designed for use in potentially explosive atmospheres (Zone 1/21 & 2/22) within harsh industrial settings such as coal mines and oil & gas facilities. Our Explosion Proof Strip Lights are designed to provide a reliable and safe lighting solution that provide continuous area lighting and targeted lighting for equipment areas.


### Features

- Explosion-Proof: ATEX approved for Zone 1/21 & 2/22, suitable for methane, coal dust, and various combustible gases.
- Long Life, Low Energy: 50,000+ hours lifespan, low energy consumption, and high efficiency.
- Versatile Lighting: White for continuous lighting, colored versions for safety systems.
- Robust Design: Flexible silica gel material, waterproof connector, and controllers for underground mines.
- High-Quality LED: High-brightness SMD LED chips for superior illumination.
- Voltage Compatibility: Rated input voltage of 48v, 36v, and 24v DC/AC for flexible installation.
- IP67 Rating: Injection-molded silicone for dust and water protection.
- Consistent Performance: High color consistency and uniformity for visually cohesive lighting.

### Application

- Wastewater treatment, oil and gas refineries, drilling rigs, petrochemical facilities, food and beverage facilities, tunnels, outdoor or indoor mounted general area lighting, and where flammable vapors, gases, ignitable dusts, fibers or flyings are present.
- Applies to hazardous locations of Zone 1/21 & 2/22 with explosive gas atmosphere.

### Certification

 II 2G Ex mb op is IIC T4 Gb

 II 2D Ex mb op is IIIC T135°C Db

## 2. Technical Data of Strip Light

### Parameters

EX marking	 
Operating temperature range	-40°C~80°C
Dimension	W20mm*H10mm
IP degree of protection	IP67
Impact strength	IK10
Standards	EN IEC 60079-0 EN IEC 60079-18 EN IEC 60079-28
Weight	285g/m

Voltage	LED QTY/m	Lumen/m	Rated power/m	Color	Rated Current (A/m)	PF
AC48V	84	800lm	12W	White	0.27	0.92
AC48V	84	250lm	10W	Amber	0.22	0.96
AC48V	84	670lm	10W	Green	0.22	0.94
AC48V	84	280lm	10W	Red	0.22	0.96

Voltage	LED QTY/m	Lumen/m	Rated power/m	Color	Rated Current (A/m)	PF
DC48V	84	1000lm	12W	White	0.25	1
DC48V	84	320lm	10W	Amber	0.21	1
DC48V	84	850lm	10W	Green	0.21	1
DC48V	84	340lm	10W	Red	0.21	1


Voltage	LED QTY/m	Lumen/m	Rated power/m	Color	Rated Current (A/m)	PF
AC36V	88	800lm	12W	White	0.37	0.91
AC36V	88	260lm	10W	Amber	0.29	0.96
AC36V	88	660lm	10W	Green	0.30	0.93
AC36V	88	270lm	10W	Red	0.29	0.96

Voltage	LED QTY/m	Lumen/m	Rated power/m	Color	Rated Current (A/m)	PF
DC36V	88	1000lm	12W	White	0.33	1
DC36V	88	330lm	10W	Amber	0.28	1
DC36V	88	900lm	10W	Green	0.28	1
DC36V	88	330lm	10W	Red	0.28	1

Voltage	LED QTY/m	Lumen/m	Rated power/m	Color	Rated Current (A/m)	PF
AC24V	84	800lm	12W	White	0.55	0.91
AC24V	84	270lm	10W	Amber	0.43	0.96
AC24V	84	630lm	10W	Green	0.45	0.93
AC24V	84	260lm	10W	Red	0.43	0.96

Voltage	LED QTY/m	Lumen/m	Rated power/m	Color	Rated Current (A/m)	PF
DC24V	84	1000lm	12W	White	0.50	1
DC24V	84	350lm	10W	Amber	0.42	1
DC24V	84	880lm	10W	Green	0.42	1
DC24V	84	310lm	10W	Red	0.42	1

## Dimension



Item	Figure	Description
Injection-moulded Front Connector(top end)		Connect light to power supply with pre-installed front feed cable, IP65/IP67.
Injection-moulded End Cap		Cross Section of Light (mm)

Note: Unless otherwise stated, the tolerance of the connector is  $\pm 0.5\text{mm}$ .

## 3. Electrical Accesories

### Explosion-proof box

Models	CES-EX-LP-A-B1	CES-EX-LP-A-B2
External dimensions	350mm*200mm*170mm	250mm*200mm*170mm
Internal dimensions	280mm*130mm*128mm	180mm*130mm*128mm
ATEX marking	II 2G Ex db IIB+H <sub>2</sub> T4 Gb	II 2D Ex tb IIIC T135°C Db
IECEx marking	Ex db IIB+H <sub>2</sub> T4 Gb	Ex tb IIIC T135°C Db
Operating temperature range	-43°C ~ 60°C	
IP degree of protection	IP 67	
Weight	9KG	8KG

### Power source



Meawell Driver

Input	Output	Max Power
100-240V/277V 50/60Hz	DC 12V/24V/36V/48V	200W

### Backup Battery (Optional)

12W Power, 1.5 Hours for Emergency Lighting

## 4. Installation mode

<p>Surface mounting</p>	
<p>Pendant mounting</p>	



**SHENZHEN CESP CO.,LTD**

Tel: +86 755 83509822

Fax: +86 755 83509868

Email: [info@cespledex.com](mailto:info@cespledex.com)

[www.cespledex.com](http://www.cespledex.com)

Add: 6 Floor Wangcheng Building, Longguan East Road, Longhua District, Shenzhen, China