




# EX-01 LED EXIT SIGN

## DIMENSIONS

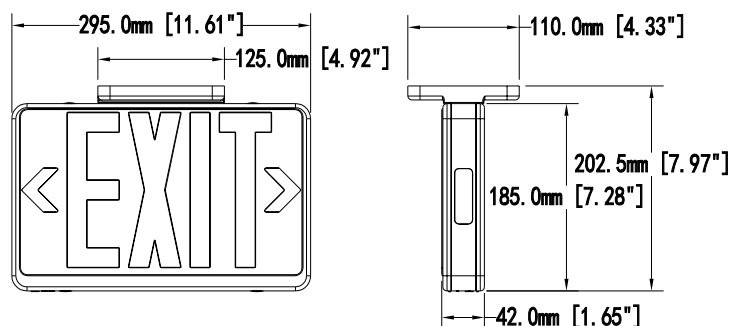

## ILLUMINATION

- Ultra-bright, energy efficient, long-life Red or Green LED.

## ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- Long-life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90 minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

## MOUNTING

- EZ-snap mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

## HOUSING

- Injection molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- EZ snap out chevron directional indicators.
- Compact, low-profile design.

## OPTIONS

- SDT: Self-diagnostic test feature continually diagnoses unit's performance and tests system to ensure reliable operation and to meet electrical and life safety codes.
- 2C: Dual-circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time.
- Custom: Signs available with requested 'special' wording.
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act.

## WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery pro-rated for five years.
- NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes..
- Damp locations.(0°C – 40°C)

## ORDERING INFORMATION

Model	Letter	No. of faces	Housing	Battery	Options
EX-01	R Red	1 Single Face	W White	Blank Battery Back-up	SDT Self-diagnostics
	G Green	2 Universal Single/Double Face	B Black	NB AC Only	2C Dual-Circuit operation