

LS - EML012 LED Emergency Light



FEATURES

Injection-molded thermoplastic ABS housing

UL-94V-0 flame rating, fire-resistant

Input Voltage: 120-277V

Power consumption: 2W max.

Output: 2.4W max.


3.6V Nickel Cadmium Battery

Charging time: 24 hours


Discharge time: 90 minutes

Operating temperature: 0°C~40°C

Dimension: 260.8*105*59.2mm

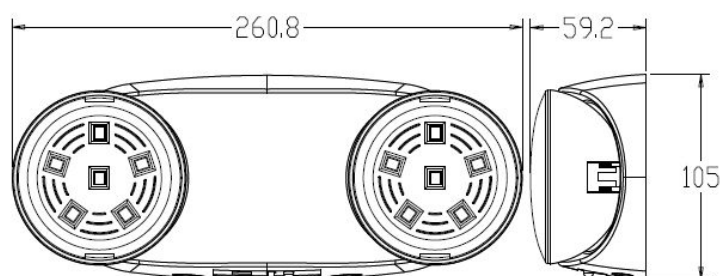

PHOTOMETRIC

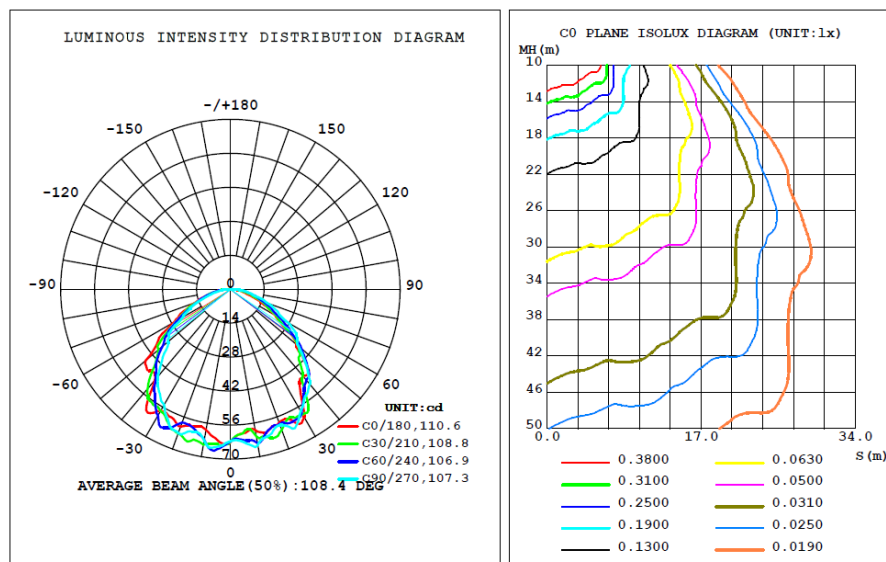

ORDER INFORMATION

Model	Voltage	Emergency Duration	Certificate
LS -EML012	120/277V	90 minutes	UL, CUL
LS -EML012D	110-240V	180 minutes	N/L
LS -EML012COB	110-240V	180 minutes	N/L