

LS -EML032 LED Emergency Light



FEATURES

Injection-molded thermoplastic ABS housing

UL-94V-0 flame rating, fire-resistant

Input Voltage: 120/277V

Power consumption: 0.6W max.

Output: 2W max.


3.6V Nickel Cadmium Battery

Charging time: 24 hours



Discharge time: 90 minutes

Operating temperature: 0°C~40°C

Dimension: 233.4*113.5*47.3mm

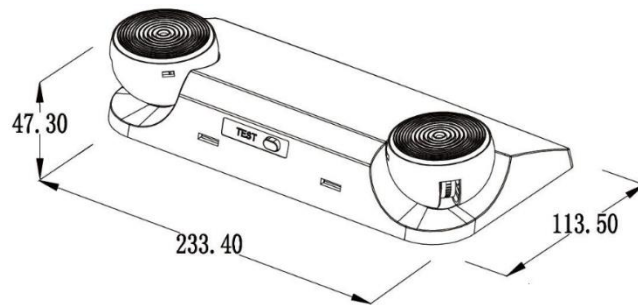

PHOTOMETRIC

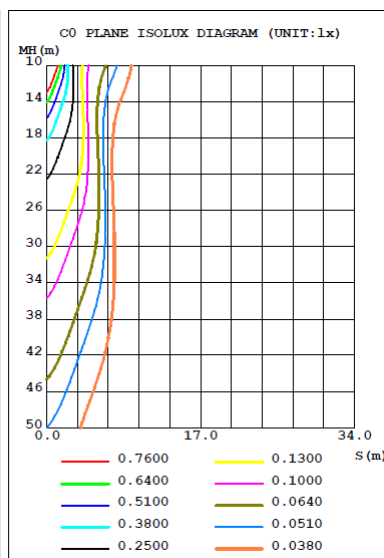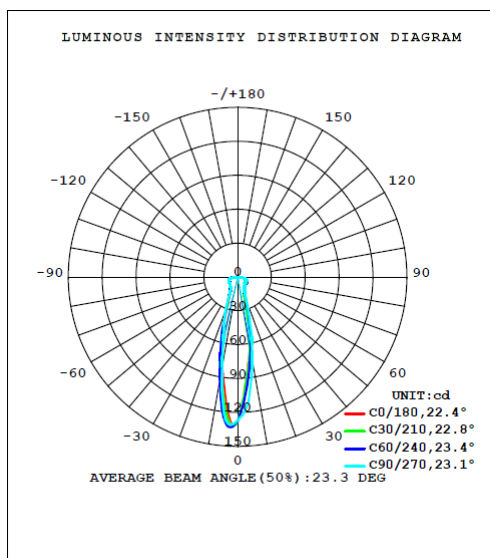

ORDER INFORMATION

Model	Voltage	Emergency Duration	Certificate
LS -EML032	120/277V	90 minutes	UL, CUL
LS -EML032D	110-240V	90 minutes	N/L