

HIGH BAY HOT SERIES

THE HIGH BAY HOT SERIES' DESIGN IS BUILT FOR TEMPERATURES UP TO 80°C (176°F). THE INNOVATIVE VERTICAL FLOW COOLING FIN DESIGN AND DRIVER BOX ALLOWS THE FIXTURE TO PERFORM IN HARSH, EXTREME HEAT ENVIRONMENTS SUCH AS DIE-CAST FACILITIES, FOUNDRIES, IRON FORGES, STEEL MILLS, POWER GENERATION, FACTORIES, AND CHEMICAL PLANTS.




DIMENSIONS

	A	B
150W	22/560	10/260
UNITS: IN/MM		

WEIGHT

150W	22.0/10.0
UNITS: LBS/KGS	

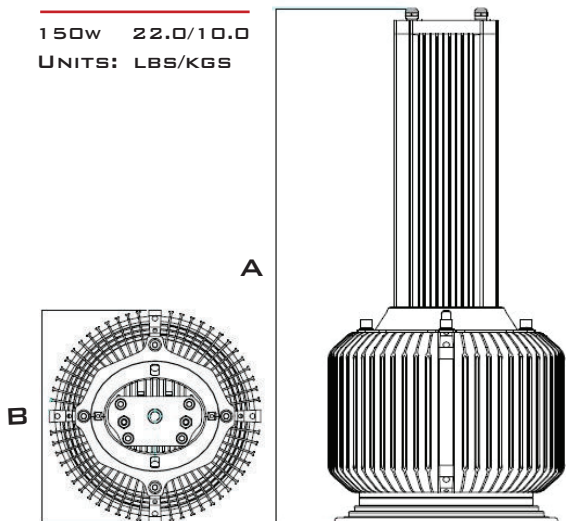

CERTIFICATIONS AND RATINGS

UL1598 WET LOCATION
UL 8750 LED SAFETY
CSA C22.2 No. 250.13-14
IP67
DLC (PENDING)



SPECIFICATIONS

POWER	150W
BEAM ANGLE	110° 60°
LUMEN OUTPUT	19,600LM (110°) 17,223LM (60°)
EFFICACY	130LM/W 115LM/W
VOLTAGE/FREQUENCY	120-277V; 50/60HZ
POWER FACTOR	≥95% @120V
SURGE PROTECTION	6KVA
CONSTRUCTION	MARINE GRADE ALUMINUM
AMBIENT TEMPERATURE	-4°F TO 176°F (-40°C TO 80°C)
DIMMING	0-10V
LENS MATERIAL	TEMPERED GLASS
HARDWARE	STAINLESS STEEL
CONNECTION	3' CORD
MOUNTING	HANGING HOOK (STANDARD)
COLOR RENDERING INDEX	RA>70
L70	60,000 HOURS
WARRANTY	3 YEAR FIXTURE WARRANTY*

*CONTACT US FOR EXTENDED WARRANTY INFORMATION

ORDER INFORMATION

HIGH BAY HOT SERIES

HBH	150	100-277	5000K	110
Fixture	Wattage	Voltage	CCT	Beam Angle
	150W	100-277	5000K 4000K	110° 60°*



ACCESSORIES

- ALR: ALUMINUM REFLECTOR
- TWIN: DUAL FIXTURE MOUNTING HARDWARE

*REQUIRES ALUMINUM REFLECTOR ACCESSORY

PHOTOMETRICS

OPTIONS

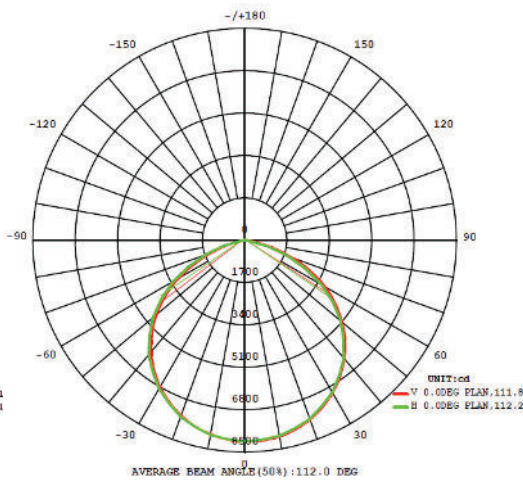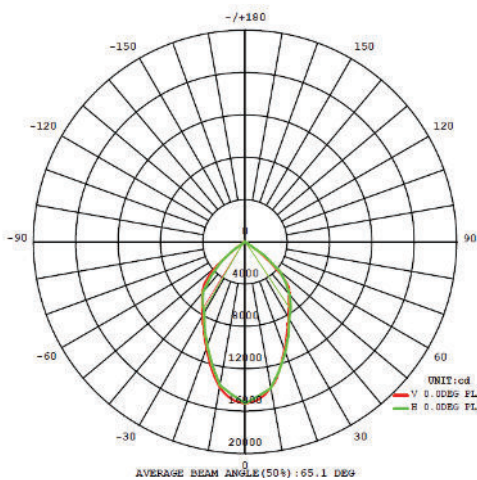

150W FIXTURE SHOWN WITH TWIN MOUNT AND ALUMINUM REFLECTOR

