



Origin Series Selectable Wrap

PROJECT INFORMATION

JOB NAME	
FIXTURE TYPE	Selectable Wrap
CATALOG NUMBER	
APPROVED BY	

SPECIFICATIONS

Construction:

Cold-rolled steel metal 22 gauge
 Toolless lens install to save installation time
 Post-painted for high quality finish

Lens:

Diffuse polycarbonate cover lens for impact resistance

Electrical:

AC Input: 120-277VAC 50/60Hz
 Driver: Constant current, Class 2
 Dimming 0-10V
 Temperatures: Min Start: -20°C Max: 40°C

LEDs:

Long-life LEDs provide 50,000 hours of operation with at least 70% of initial output (L70).
 CCT Selectable: 3500K, 4000K, 5000K

Listings:

Luminaire is certified to UL/cUL Standards for Damp Locations.

Testing:

Atlas LED luminaires have been tested by an independent laboratory in accordance with IESNA LM-79 & LM-80.


Warranty:

Five-year limited warranty



DIMENSIONS

Weight: 4.9 lbs

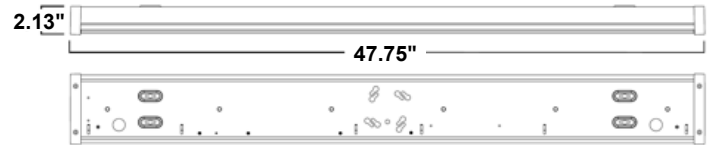

¹LED Life Span Based Upon LM-70 Test Results

Rebates and Incentives are available in many areas.
 Contact an Atlas Representative for more information.

*The majority of Atlas Lighting Products are assembled in USA facilities by an American Workforce utilizing both Domestic and Foreign components. Meets Buy American requirements within the ARRA.



Origin Series
Selectable Wrap

ORDERING INFORMATION

ORW	S	4	3-5L		
PRODUCT SERIES	SELECTABLE	FIXTURE LENGTH	LUMEN PACKAGE	COLOR TEMP.	CONTROLS
ORW = Wrap	S = Selectable	4 = 4 Feet	3-5L = 3,000 - 5,000 Lumens Selectable	blank = Selectable 3500K, 4000K, 5000K	Blank = Dimming (0-10V)

PERFORMANCE DATA

UNIT	CRI	3500K CCT		4000K CCT		5000K CCT		WATTAGE
		DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	
3-5L	80	2,539	127	2,712	138	2,577	129	20
		3,799	125	4,057	135	3,856	127	30
		4,937	121	5,272	131	5,010	123	40

DLC PRODUCT INFORMATION

UNIT	DLC PRODUCT ID	CLASSIFICATION
ORWS43-5L	S-L6RCLL	Standard