



CL-3050 Cable Mount Luminaires. Available in three different sizes and in multiple finishes. CL-3050 fixture is commonly installed in Interior / Exterior facilities such as: Public Buildings, Shopping Plazas, Restaurants and others Business Facilities or Residential Areas.  
-5 Year Limited Warranty.


**FEATURES**

- 120/277 Multi-volt
- UL listed for Damp and Wet Locations
- 0-10 Dimming Driver

**CONSTRUCTION**

- Opal Acrylic Globe / Aluminum Cap and Canopy
- 3mils Powder Coat Finish (Multiple finishes available)
- Aircraft Cable (Stainless Steel).


**Globe Sizes**

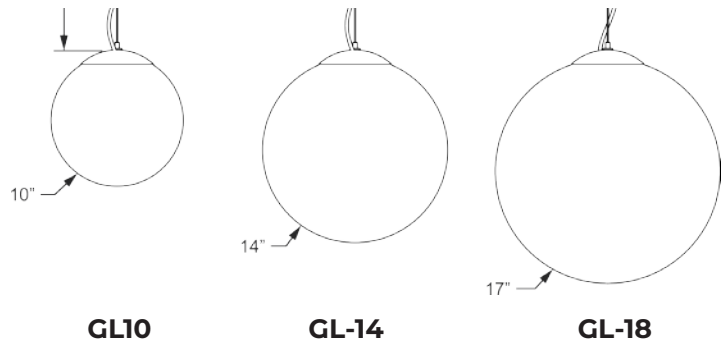

Example: CL-3050-GL10-10CLEd-30K-MV-CPV-CB4

Cat #	Globe Sizes	Wattage	Color Temp.	Voltage	Finish	Mounting	Options
CL-3050	10" Globe (GL10)	10W (10CLEd)	3000K (30K)	120-277V (MV)	Matte Black (MBLK) Glossy Black (GBLK) Texture Black (TBLK) Texture White (TWHT) Silver (SLR) Bronze (BRZ) Graphite (GPH) Copper Vein (CPV) Silver Vein(SLV) Oil Rubbed Bronze (ORB)	Aircraft Cable	Clear Acrylic Lens (CAL)
	14" Globe (GL14)	20W (20CLEd)	4000K (40K)			CBM 4' (CBM2)	
	18" Globe (GL18)	30W (30CLEd)	5000K (50K)			CBM 6' (CBM3)  Custom (CST)	

## Mounting Options

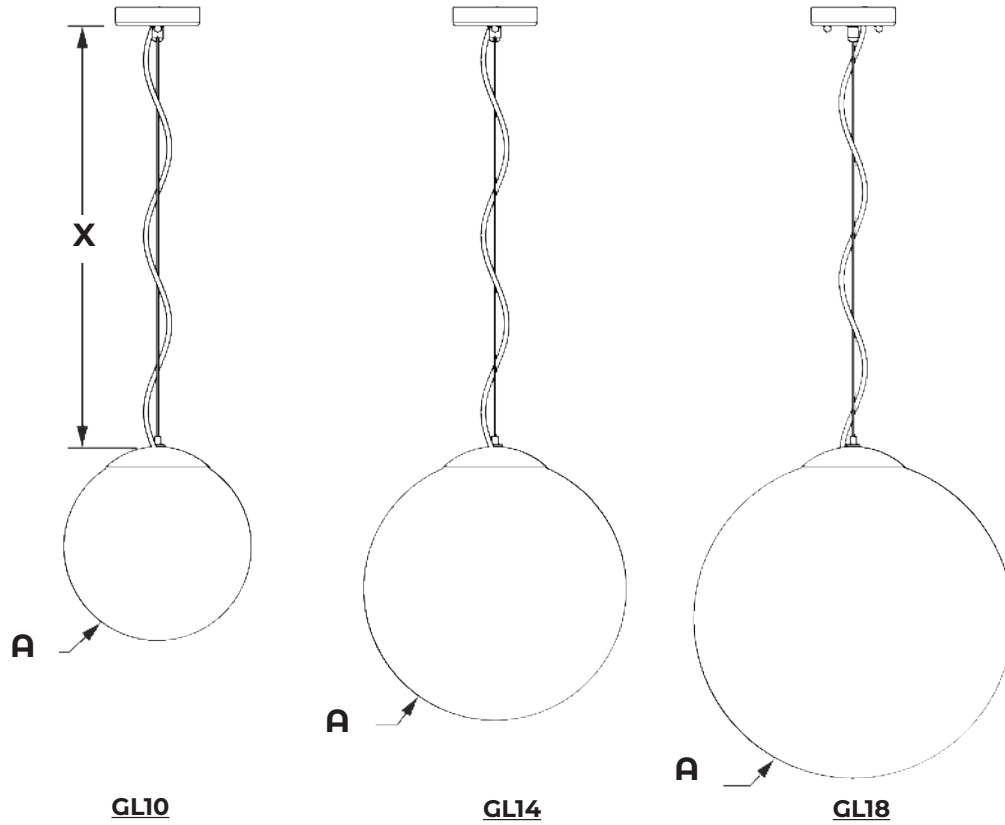

Cat#	A
CL-3050-GL10	10"
CL-3050-GL14	14"
CL-3050-GL18	18"

Cat #	Input Power	Lumen Output	LPW	Color Temp. (CCT)	CRI	Rated Life (L70)	Input Voltage
CL-3050- <b>GL10/14/18</b> -10CLED	15W	1,914	191	5000K	70+	>200,000	120-277V
CL-3050- <b>GL10/14/18</b> -20CLED	25W	2,935	146	5000K	70+	>200,000	120-277V
CL-3050- <b>GL10/14/18</b> -30CLED	35W	4842	161	5000K	70+	>200,000	120-277V

Proudly Manufactured and Assembled in the USA