


CL-3061 Wall Vanity Light, Adds a touch of modern and elegance to your interiors. Available in multiple finishes to choose from to suit desired requirements. CL-3061 Vanity is commonly Installed in Bathrooms, Powder Rooms, Hallways. CL-3061 is 100% manufactured in the USA.

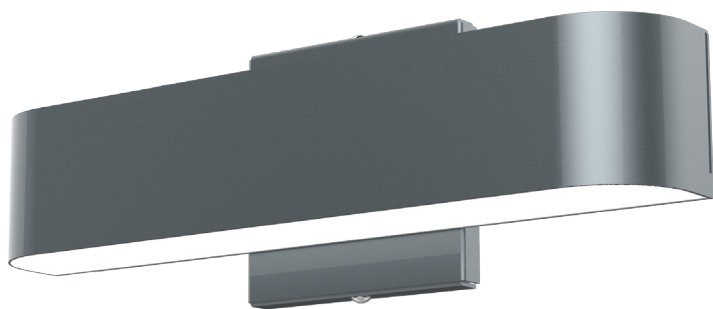

- Ten year/100,000 hour limited warranty.

Features

- Utilizes high efficient Lumiled LED's
- Operating temperatures: -30°C ~ 60°C
- Driver: Constant current, 120-277v, 50/60Hz.
- Suitable for wet locations
- 0-10 Dimming Driver, Micro Wave Sensor (Optional)

Construction



- Housing is heavy-Gauge Aluminum
- 3 Mil Powder Coat Finish.
- Frosted Acrylic Lens (Standard)
- Silicone Gasket to prevent leakage and provide weather-tight protection.
- Mounting: Over 4" "J" Box.



Example: CL-3061-20CLEd-SYM-40K-MV-BZ-MWS



| Cat # | Wattage | Light Dist. | Color Temp. | Voltage | Finish | Options |
|----------------|--|---------------------------|---|-------------------------|--|--|
| CL-3061 | 10W (10CLEd) 15W (15CLEd) 20W (20CLEd) | Symmetric (SYM) | 3000K (30K) 4000K (40K) 5000K (50K) | 120-277V (MV) | Black (BLK) White (WHT) Silver (SLR) Bronze (BRZ) Graphite (GPH) Custom (CST) | Micro Wave Sensor (MWS) Opal Acrylic Lens (OAL) |

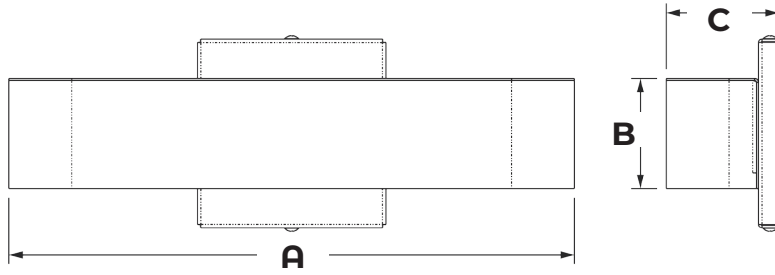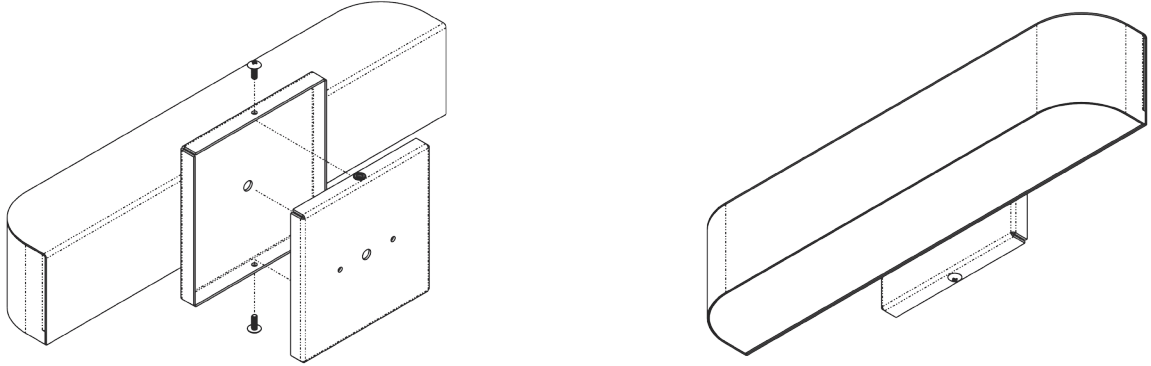

| Dimensions | | | |
|------------|----|--------|--------|
| Cat# | A | B | C |
| CL-3061 | 18 | 3" 1/2 | 3" 1/2 |

| Cat # | Input Power | Lumen Output | LPW | Color Temp. (CCT) | CRI | Rated Life (L70) | Input Voltage | HID Equivalent |
|----------------|-------------|--------------|-----|-------------------|-----|------------------|---------------|----------------|
| CL-3061-10CLED | 15W | 1,914 | 191 | 5000K | 70+ | >200,000 | 120-277V | 50W HPS |
| CL-3061-15CLED | 20W | 2,481 | 165 | 5000K | 70+ | >200,000 | 120-277V | 70W HPS |
| CL-3061-20CLED | 25W | 2,935 | 146 | 5000K | 70+ | >200,000 | 120-277V | 100W HPS |

Proudly Manufactured and Assembled in the USA