



CLH-3052 is available in three different sizes and in multiple finishes to choose from to suit desired requirements. It also includes an acrylic lens. This ceiling mount fixture is commonly installed in interior facilities such as Offices, Restaurants, Indoor Shopping Areas, and Residential Homes.


-10 Year Limited Warranty.

Features

- Driver 120/277, 0-10v Dimming Driver.
- Available in 30K/80CRI Standard, 40K, 50k or 90CRI (Optional)
- UL listed for damp and wet locations
- Options: EMR.

Constructions

- Housing Heavy Gauge Aluminum.
- Opal Acrylic Lens (Standard)
- 3 mil Powder Coating


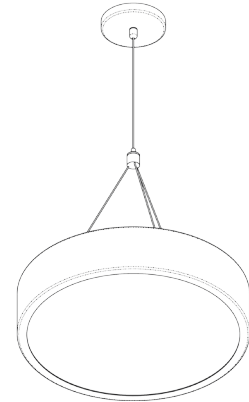


PHILIPS LUMILEDS



Example: CLH-3052S-50LED-30K-80CRI-MV-AOL-FBLK-1AC

Cat #	Wattage	Color Temp.	CRI	Voltage	Lens	Finish	Mounting	Options
CLH-3052-S (CLH3052S)	50W (50CLED)	3000K (30K)	80CRI (80CRI)	120-277V (MV)	Opal Acrylic Lens (AOL)	Flat Black (FBLK) Silver (SLR) Custom (CST)	Ceiling Mount (CM)	Emergency Battery (EMR)
CLH-3052-M (CLH3052)	150W (150CLED)	4000K (40K)	90CRI (90CRI)					
CL-3052-L (CLH3052L)	200W (200CLED)	5000K (50K)						
					Frosted Acrylic Lens (FAL)		Pendant Mount Aircraft Cable Length 1FT (1AC) 2FT (2AC) 3FT (3AC) 4FT (4AC) Custom (CST)	

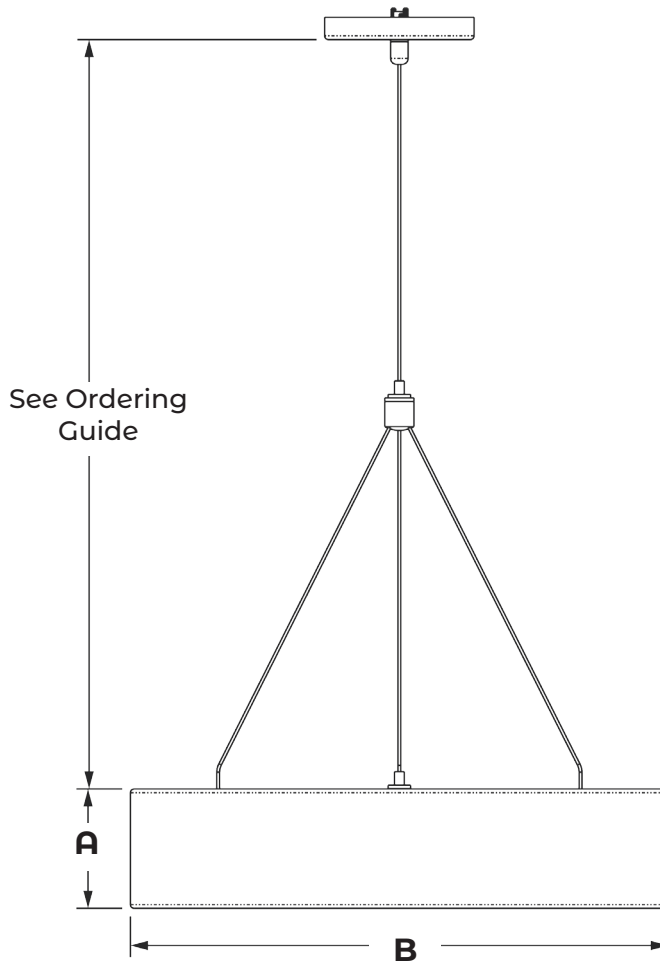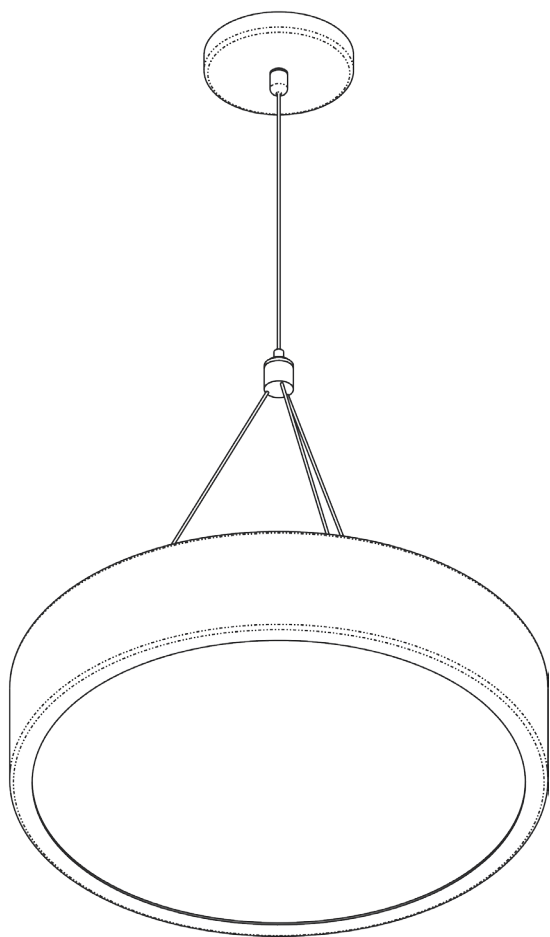

Cat#	A	B
CLH-3052-S	4"	18"
CLH-3052-M	4"	24"
CLH-3052-L	5"	48"

Cat #	Input Power	Lumen Output	Color Temp. (CCT)	CRI	Rated Life (L70)	Input Voltage
CLH-3052S-50CLED	55W	3,800	3000K	80+	>200,000	120-277V
CLH-3052M-150CLED	155W	12,600	3000K	80+	>200,000	120-277V
CLH-3052L-200CLED	205W	28,000	3000K	80+	>200,000	120-277V

Proudly Manufactured and Assembled in the USA