

CLH-4011

Ceiling / Pendant LED Lighting
DESIGN-FUNCTION-QUALITY



Crystal Lighting Corp.





CLH-4011 LED Pendant, Low Profile Dome. Available in 20", 30" and 45" O.D. CLH-4011 PM fixture is commonly installed in interior facilities such as Office, Restaurants, Walkways, Restrooms and other Residential and Commercial applications.
- 10 Year Limited Warranty

Features

- Driver 120-277V Constant Current.
- Available in 30K/80CRI Standard, 40K, 50k or 90CRI (Optional)
- Suitable for damp locations.
- Options : EMR (Consult factory for any special requirements or specifications.)
- Suitable for Damp Location.

Constructions.

- Opal Acrylic Lens.
- Aluminum Ring
- 3 Mil Powder Coat Finish.(For custom finishes please consult factory.)



CLH-4011-A



CLH-4011-B



CLH-4011-C






Example: CLH-4011A-20-50CLED-50K-80CRI-MV-PM12-SLR



PHILIPS
LUMILEDS



Cat #	Dia.	Wattage	Color Temp.	CRI	Voltage	Finish	Mounting	Options
CLH-4011-A (CLH-4011A)	20" O.D (20)	50W (50CLED)	3000K (30K)	80CRI (80CRI)	120-277V (MV)	White (WHT)	<u>Pendant Mount</u> 1/2IP Stem or Aircraft Cable	EMR. Battery (EMR)
CLH-4011-B (CLH-4011B)	30" O.D (30)	150W (150CLED)	4000K (40K)	90CRI (90CRI)	480V (HV)	Silver (SLR)		
CLH-4011-C (CLH-4011C)	45" O.D (45)	200W (200CLED)	5000K (50K)			Black (BLK)	1Ft (PM1)	
						Bronze (BRZ)	2Ft. (PM2)	
						Graphite (GPH)	3Ft. (PM3)	
						Custom (CST)	4Ft. (PM4)	
							Custom (CST)	

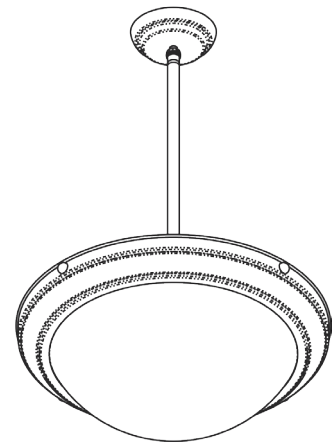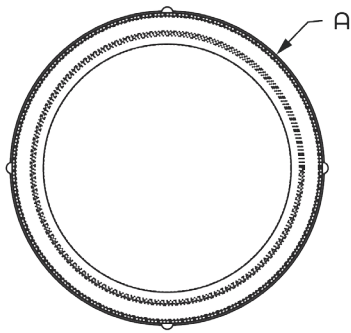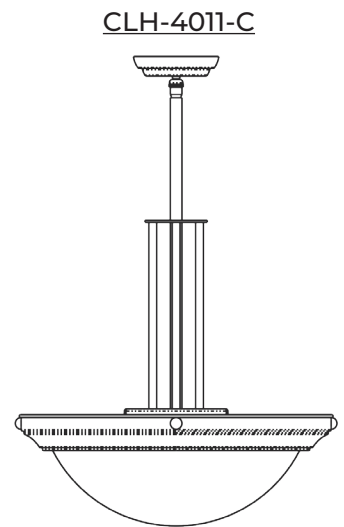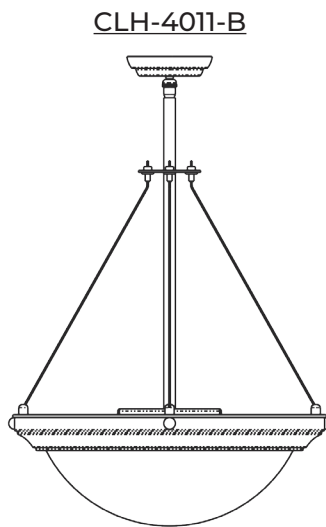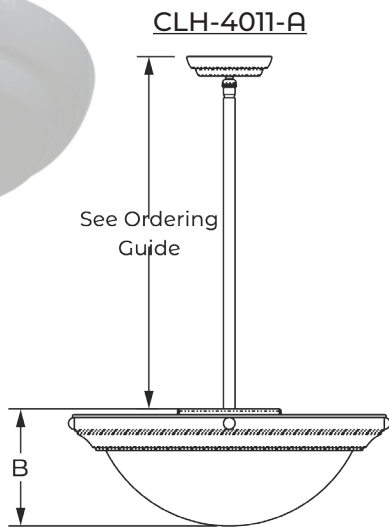

Cat#	A	B	C
CLH-4011-20	20"	7" 1/2	-
CLH-4011-30	30"	10	-
CLH-4011-45	45"	12" 1/2	-

Cat #	Input Power	Lumen Output	Color Temp. (CCT)	CRI	Rated Life (L70)	Input Voltage
CLH-4011-50CLED	55W	3,800	3000K	80+	>200,000	120-277V
CLH-4011-150CLED	155W	12,600	3000K	80+	>200,000	120-277V
CLH-4011-200CLED	205W	28,800	3000K	80+	>200,000	120-277V

Proudly Manufactured and Assembled in the USA