




## Lyra Solar Bollard Aluminium powdercoated to a satin grey finish

## Eco Solar Lights



Suitable to fix to most surfaces

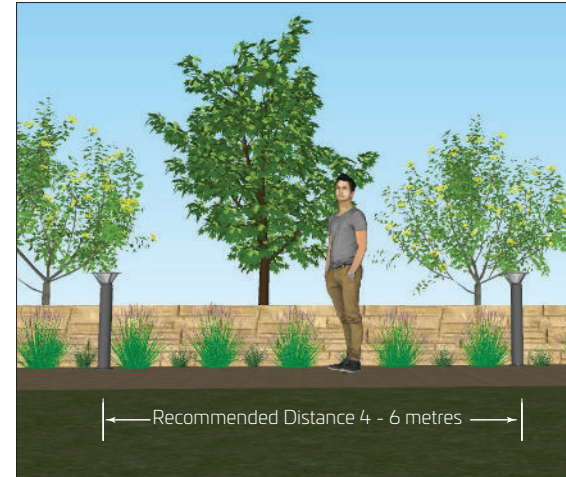

Solar panel including light sensor



### Features

- Commercial grade solar lighting
- Requires 10 - 12 hrs charge prior to use
- 10 - 12 hours light output per night
- High quality inbuilt Life PO4 battery
- Attractive modern design
- Ideal for illuminating paths and walkways
- Automatic light sensor turns LEDs on and off for dusk to dawn operation
- Warranty: 1 year warranty for faulty workmanship or component failure not influenced by external means

### Specifications SOLB004


- |                |                          |                    |                                   |
|----------------|--------------------------|--------------------|-----------------------------------|
| • Colour       | Powdercoat satin grey    | • Solar Panel      | 9V 7watts                         |
| • Charge Time  | 4 - 6 hours              | • Solar Panel Size | 150H x 160Wmm                     |
| • CCT          | 4000K (cool white)       | • Light Source     | 36 high intensity LEDs            |
| • Bollard Size | 1000H x 295Wmm (top)     | • Battery          | LiFePO4 battery                   |
| • Brightness   | Approx. 350 lumen output | • Material         | Aluminium, polycarbonate diffuser |

### What is a Lumen?

In simple terms, Lumens are a measure of the total amount of visible light from a lamp or light source. The higher the lumen rating, the "brighter" the lamp will appear.

### How does this compare with other light sources?

- Familiar examples
- A typical 4 x D cell battery maglite will emit approx. 70 lumens
  - The average hardware style path light using 2-3 LEDs emits 15-18 lumens
  - A 25W incandescent globe emits approximately 160 lumens

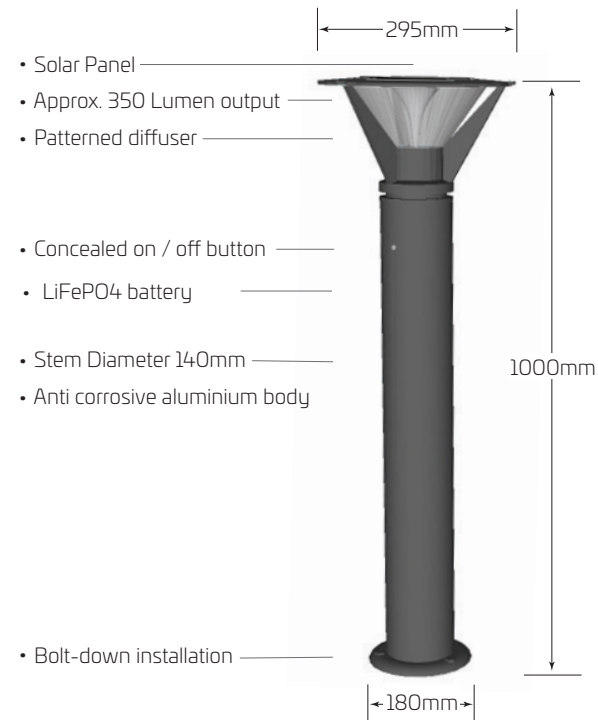

36 LEDs encased in patterned diffuser



4 x fixing points

