

CLP-330FAL-B
Architectural LED Bollard
DESIGN - QUALITY



Crystal 
Lighting



PROJECT NAME			
TYPE		DATE	
NOTES			

CLP-330FAL-B

Architectural LED Bollard



CLP-330FAL-B Architectural Aluminum Bollard, combination of Security and Vandal-Resistant, Slim Bollard Design. Uniform illumination for Pathways and Landscape., 24, 36 or 42 standard heights. Ideal for lighting Pedestrian Walkways and Accenting the Exterior Grounds of Office or Apartment Buildings, Hotel and Parks.

-10 year/100,000 hour limited warranty.


FEATURES

- Energy Savings: Over 66% compared to HID light sources
- Improved lumen maintenance
- Utilizes high efficient LED's
- Operating temperatures: -30°C ~ 60°C
- Driver: Constant current, 120-277v, 50/60Hz, 480v (Optional)
- Suitable for wet locations
- Dimming, occupancy sensors, photo cell and wireless controls capable (optional)
- Operating Life: >80,000 hours


CONSTRUCTION

- Extruded Aluminum Body
- Powder coat finish
- Clear optical lens
- Silicone gasket to prevent leakage and provide weather-tight protection
- Mounting: 1/2" Anchor Bolts Included

OPTIC DISTRIBUTION



TYPE 3 (T3)



TYPE 5 (T5)

Example: (CLB-330FAL-B-24-T3-16CLED-30K-MV-BLK-EMR)





LISTED

PHILIPS LUMILEDS



CLP-330FAL-B							
CAT #	LENGT.	DISTR.	WATTS	COLOR TEMP.	VOLTAGE	COLOR	OPTIONS
CLP-330FAL-B	24" (24)	TYPE 3 (T3)	12W (12CLED)	3000K (30K)	120-277V (MV)	BLACK (BLK)	Wireless Controls (WC)
	36" (36)	TYPE 5 (T5)	16W (16CLED)	4000K (40K)	480V (48)	WHITE (WH)	Emergency Battery Backup (EMR)
	42" (42)		24W (24CLED)	5000K (50K)		BRONZE (BRZ)	Anchor Bolt Kit
			36W (36CLED)			SILVER (SIL)	(4) 3/8 X12" Long Anchor Bolts (BAK12)
						GRAPHITE (GPH)	
						MARINE GRADE (MG)	

All products are proudly manufactured and/or assembled in the USA

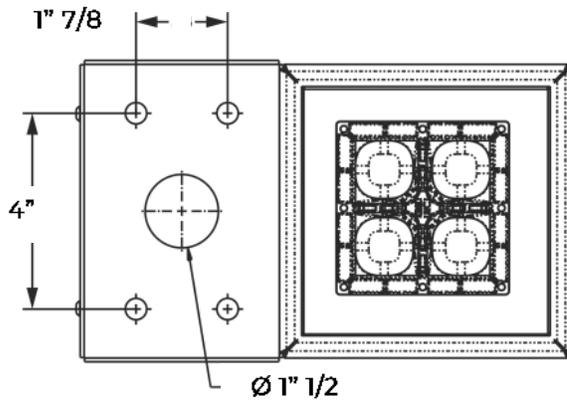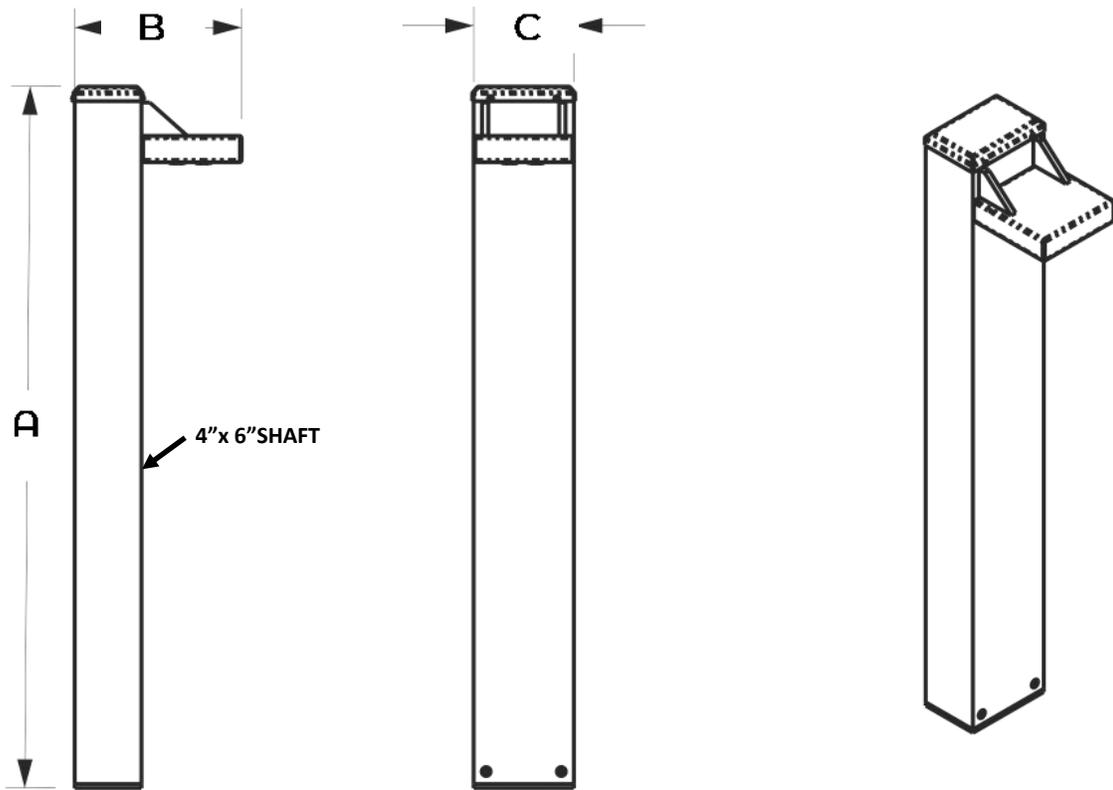

Dimensions			
CAT#	A	B	C
CLP-330FAL-B-42	24"	10"	6"
CLP-330FAL-B-36	36"	10"	6"
CLP-330FAL-B-42	42"	10"	6"

CAT#	INPUT-POWER	LUMEN-OUTPUT	SCOTOPIC	COLOR-TEMP (CCT)	CRI	RATED LIFE (L70)	INPUT VOLTAGE	INPUT FREQUENCY	HID Equivalent
CLB-330FAL-12CLED	13W	1,812	2,900	5000K	70	>200,000	120-277V	50/60HZ	70w MH
CLB-330FAL-16CLED	18W	2,484	3,974	5000K	70	>200,000	120-277V	50/60HZ	100w MH
CLB-330FAL-24CLED	26W	3,300	5,280	5000K	70	>200,000	120-277V	50/60HZ	100w HPS
CLB-330FAL-36CLED	40W	4,608	7,372	5000K	70	>200,000	120-277V	50/60HZ	150w MH

All products are proudly manufactured and/or assembled in the USA