

CL-2094 is Designed with a Pyramid Top and includes geometric lines that overlap an opal acrylic lens. This fixture is available in three different sizes to best suit desired specifications. CL-2094 is commonly installed in exterior locations such as: Hotels, Restaurants, Public Transportations Facilities and Other Commercial Areas.

-10year or 10,000 Hour Limited Warranty

#### Feactures:

- 120/277 Multi-volt
- UL listed for damp and wet locations
- Kelvin: 30K, 40K or 50K
- High efficacient Lumined LED`s

#### Construction

- Housing is Heavy Gauge Aluminum material.
- Frosted Acrylic Lens (Standard)
- Multiple Finishes to choose (See Ordering Guide)



Post Top



Wall Mount



Sconce

Example: CL-2079S-10CLEDD-30K-MV-BLK-WM-PC

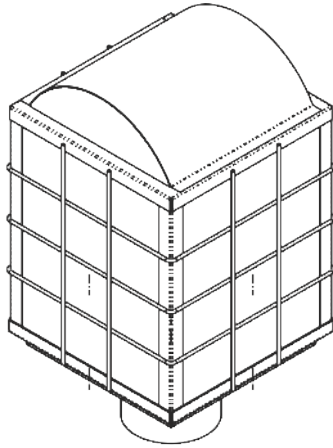
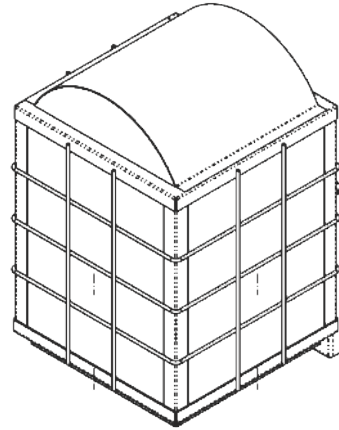
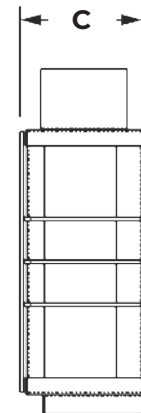
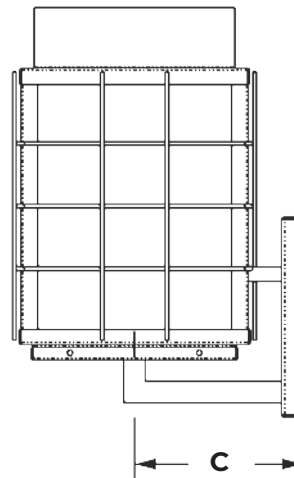
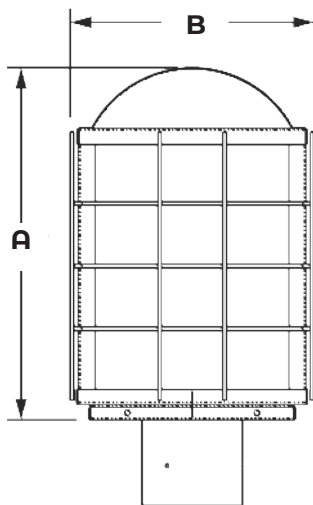
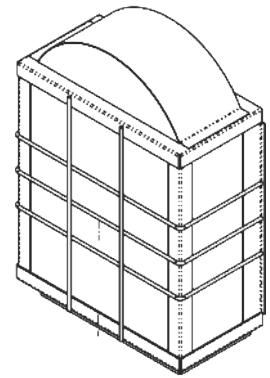


PHILIPS  
LUMILEDS



Cat #	Wattage	Color Temp.	Voltage	Finish	Mounting	Options
CL-2094 Small (CL-2094S)	5W (5CLEDD)	3000K (30K)	120-277V (mv)	Matte Black (MBLK)	Post Top (PT)	Button Photocell (PC)
CL-2094 Medium (CL-2094M)	10W (10CLEDD)	4000K (40K)		Glossy Black (GBLK)	Wall Mount (AM)	Micro Wave Sensor (MWS)
CL-2094 Large (CL-2094L)	20W (20CLEDD)	5000K (50K)		Texture Black (TBLK)	Sconce (SCN)	Emergency Batt. Pack (EMR)
	25W (25CLEDD)			Texture White (TWHT)		Opal Acrylic Lens (OAL)
	30W (30CLEDD)			Silver (SLR)		
	40W (40CLEDD)			Bronze (BRZ)		
				Graphite (GPH)		

## Mounting Options

**Post Top****Arm Mount****Sconce****Post Top**

Cat#	A	B
CL-2094S	10"	6"
CL-2094M	12"	8"
CL-2094L	15"	10"

**Arm Mount**

Cat#	A	B	C
CL-2094S	10"	6"	8"
CL-2094M	12"	8"	10"
CL-2094L	15"	10"	12"

**Sconce**

Cat#	A	B	C
CL-2094S	10"	6"	3"
CL-2094M	12"	8"	4"
CL-2094L	15"	10"	5"

Cat #	Input Power	Lumen Output	LPW	Color Temp. (CCT)	CRI	Rated Life (L70)	Input Voltage
CL-2094S-5CLED	10W	918	183	5000K	70+	>200,000	120-277V
CL-2094S-10CLED	15W	1,914	191	5000K	70+	>200,000	120-277V
CL-2094S-15CLED	20W	2754	183	5000K	70+	>200,000	120-277V
CL-2094s/m-20CLED	25W	2,935	146	5000K	70+	>200,000	120-277V
CL-2094m/L-30CLED	35W	4842	161	5000K	70+	>200,000	120-277V
CL-2094m/L-35CLED	40W	5320	152	5000K	70+	>200,000	120-277V
CL-2094m/L-40CLED	45W	6252	156	5000K	70+	>200,000	120-277V

Proudly Manufactured and Assembled in the USA