



CL-674 Wall Sconce adds a touch of elegance to your Esteriors. alu-
minum Housing and Opal Acrylic Lens, many Powder Coat finish-
es to choose. CL-674 a Lighting Solution for Modern Archiectural
Buildings, Offices, Restaurants, Exterior Hallways and other Outdoor
/ Indoor Spaces. CL-674 is Available in 24", 36" and 48" Long.

-10 Year Limited Warranty.




- FEATURES
- Driver 120/277, 0-10v Dimming Driver.
 - Available in 30K/80CRI Standard, 40K, 50k or 90CRI are optional
 - Lumileds Flex LED strip
 - 80 CRI
 - Suitable for damp locations
 - Micro Wave Sensor(Motion Sensor)

- CONSTRUCTION
- Aluminum Housing
 - 3 Mils Powder Coating baked at 400°
 - Opal Acrylic Lens (Standard)



Example: CL-674-2-10CLED-30K-80CRI-MV-BLK-WM

Cat #	Length	Wattage	Color Temp.	CRI	Voltage	Finish	Mounting	Options
CL-674	24" (2)	10W (10CLED)	3000K (30K)	80CRI (80CRI)	120-277V (MV)	Black (BLK) White (TWHT) Silver (SLR) Bronze (BRZ) Graphite (GPH) Custom (CST) Brushed Aluminum (BSH-A)	Wall Mount (WM)	Micro Wave Sensor (MWS)
	----- 36" (3)	20W (20CLED)	4000K (40K)	90CRI (90CRI)				
	----- 48" (4)	30W (30CLED)	5000K (50K)					
		40W (40CLED)						
		50W (50CLED)						
		60W (60CLED)						

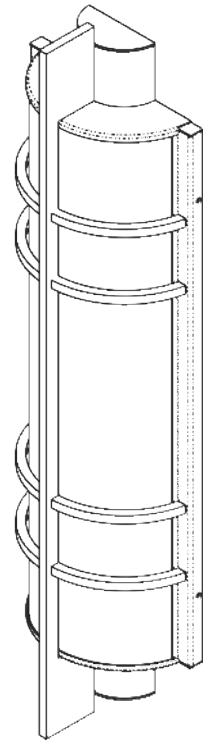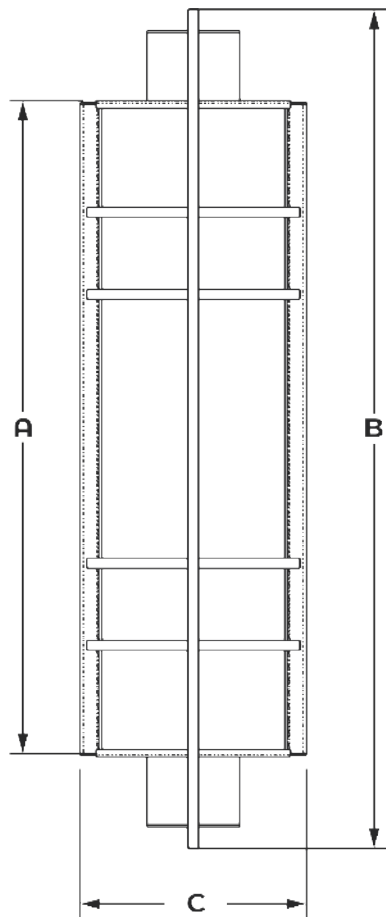

Cat#	A	B	C	D
CL-674-2	24"	31"	8" 3/8	4" 1/8
CL-674-3	36"	43"	8" 3/8	4" 1/8
CL-674-4	48"	55"	8" 3/8	4" 1/8

Cat #	Input Power	Lumen Output	LPW	Color Temp. (CCT)	CRI	Rated Life (L70)	Input Voltage
CL-674-2-10CLED	15W	1,343	134	3000K	80+	>200,000	120-277V
CL-674-2-20CLED	25W	2,154	107	3000K	80+	>200,000	120-277V
CL-674-3-30CLED	35W	4,029	134	3000K	80+	>200,000	120-277V
CL-674-3-40CLED	45W	4,828	120	3000K	80+	>200,000	120-277V
CL-674-4-50CLED	55W	6,416	128	3000K	80+	>200,000	120-277V
CL-674-4-60CLED	65W	7,701	128	3000K	80+	>200,000	120-277V

Proudly Manufactured and Assembled in the USA