


FEATURES

- Perfect for attracting fish
- Color Choices: green or blue
- Input voltage: 100-277 VAC
- High protection level up to IP68
- High impact resistance, meeting IK10
- Low EPA design, anti 17-level wind power
- High vibration resistance, meeting 3G standards
- Aluminum powder coated fixture
- 304 stainless steel mounting brackets and hardware
- LED Lifespan: 50,000 hours
- Warranty: 2 years (extendable to 5 years for continental non-fishing applications)
- Optimal mounting height: between 8 -15 feet above the water







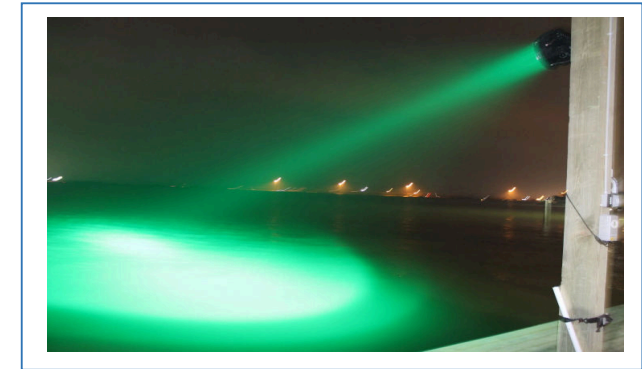





APPLICATIONS

- Fishing lights
- Dock lights
- Pier lights

***Above Water Use Only**




SPECIFICATIONS

Product Pictures												
Model No.	5H240G	5H320G	5H480G	5H720G	5H920G	5H1100G	5H240B	5H320B	5H480B	5H720B	5H920B	5H1100B
Power	240W	320W	480W	720W	920W	1,100W	240W	320W	480W	720W	920W	1,100W
Light Color	Green	Green	Green	Green	Green	Green	Blue	Blue	Blue	Blue	Blue	Blue
Voltage	100-277Vac	100-277Vac	100-277Vac	100-277Vac	100-277Vac	100-277Vac	100-277Vac	100-277Vac	100-277Vac	100-277Vac	100-277Vac	100-277Vac
Lumen	17,136 LM	22,848 LM	34,272 LM	51,408 LM	67,160 LM	80,850 LM	4,920 LM	6,560 LM	9,840 LM	14,760 LM	19,320 LM	23,430 LM
Beam Angle	16°/40°/60°/90°	16°/40°/60°/90°	16°/40°/60°/90°	16°/40°/60°/90°	16°/40°/60°	16°/40°/60°	16°/40°/60°/90°	16°/40°/60°/90°	16°/40°/60°/90°	16°/40°/60°/90°	16°/40°/60°	16°/40°/60°
Fixture Material	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Fixture Color	Bronze(STD.)	Bronze(STD.)	Bronze(STD.)	Bronze(STD.)	Bronze(STD.)	Bronze(STD.)	Bronze(STD.)	Bronze(STD.)	Bronze(STD.)	Bronze(STD.)	Bronze(STD.)	Bronze(STD.)
Driver	Mean Well	Mean Well	Mean Well	Mean Well	Mean Well	Mean Well	Mean Well	Mean Well	Mean Well	Mean Well	Mean Well	Mean Well
Product Weight	13.8 kgs	13.8 kgs	14.9 kgs	20.7 kgs	28.9 kgs	33.0 kgs	13.8 kgs	13.8 kgs	14.9 kgs	20.7 kgs	28.9 kgs	33.0 kgs
IP Rating	IP68	IP68	IP68	IP68	IP68	IP68	IP68	IP68	IP68	IP68	IP68	IP68
EPA Rating	0.87 ft ²	0.87 ft ²	0.87 ft ²	0.97 ft ²	1.24 ft ²	1.24 ft ²	0.87 ft ²	0.87 ft ²	0.87 ft ²	0.97 ft ²	1.24 ft ²	1.24 ft ²
Operating Temp.	-30°C to +40°C	-30°C to +40°C	-30°C to +40°C	-30°C to +40°C	-30°C to +40°C	-30°C to +40°C	-30°C to +40°C	-30°C to +40°C	-30°C to +40°C	-30°C to +40°C	-30°C to +40°C	-30°C to +40°C
Average Lifespan	50,000 hours	50,000 hours	50,000 hours	50,000 hours	50,000 hours	50,000 hours	50,000 hours	50,000 hours	50,000 hours	50,000 hours	50,000 hours	50,000 hours
Warranty	2-year limited	2-year limited	2-year limited	2-year limited	2-year limited	2-year limited	2-year limited	2-year limited	2-year limited	2-year limited	2-year limited	2-year limited


***Product photos may not be to scale and are for general reference only.**

DIMENSIONS


240W/320W/480W

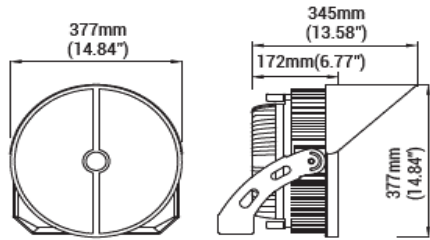

720W

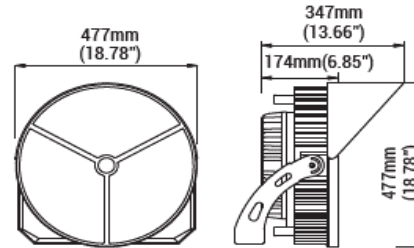

920W/1100W

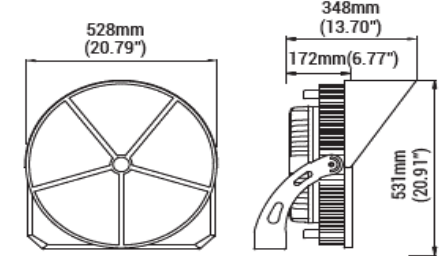

ORDERING INFORMATION

Order Example: 5H480GLBR042

LED Fish Attracting Lights , 480W, Green Light Color, 100-277Vac, Bronze Finish, 40°

Series	Wattage	Light Color	Voltage	Finish	Beam Angle	LED Brand	Options
5H= LED Fish Attracting Lights	240= 240W 320= 320W 480= 480W 720= 720W 950= 950W 1100= 1100W	G= Green B= Blue	L= 100-277Vac	BR=Bronze(Std.) WH=White BK=Black	01=16° 04=40° 06=60° 09=90°	1=Nichia 2=Osram 3=Seoul 4=Philips 5=CREE	[Blank]= None D= 0-10V Dimmable S=Surge Protector(SPD)