
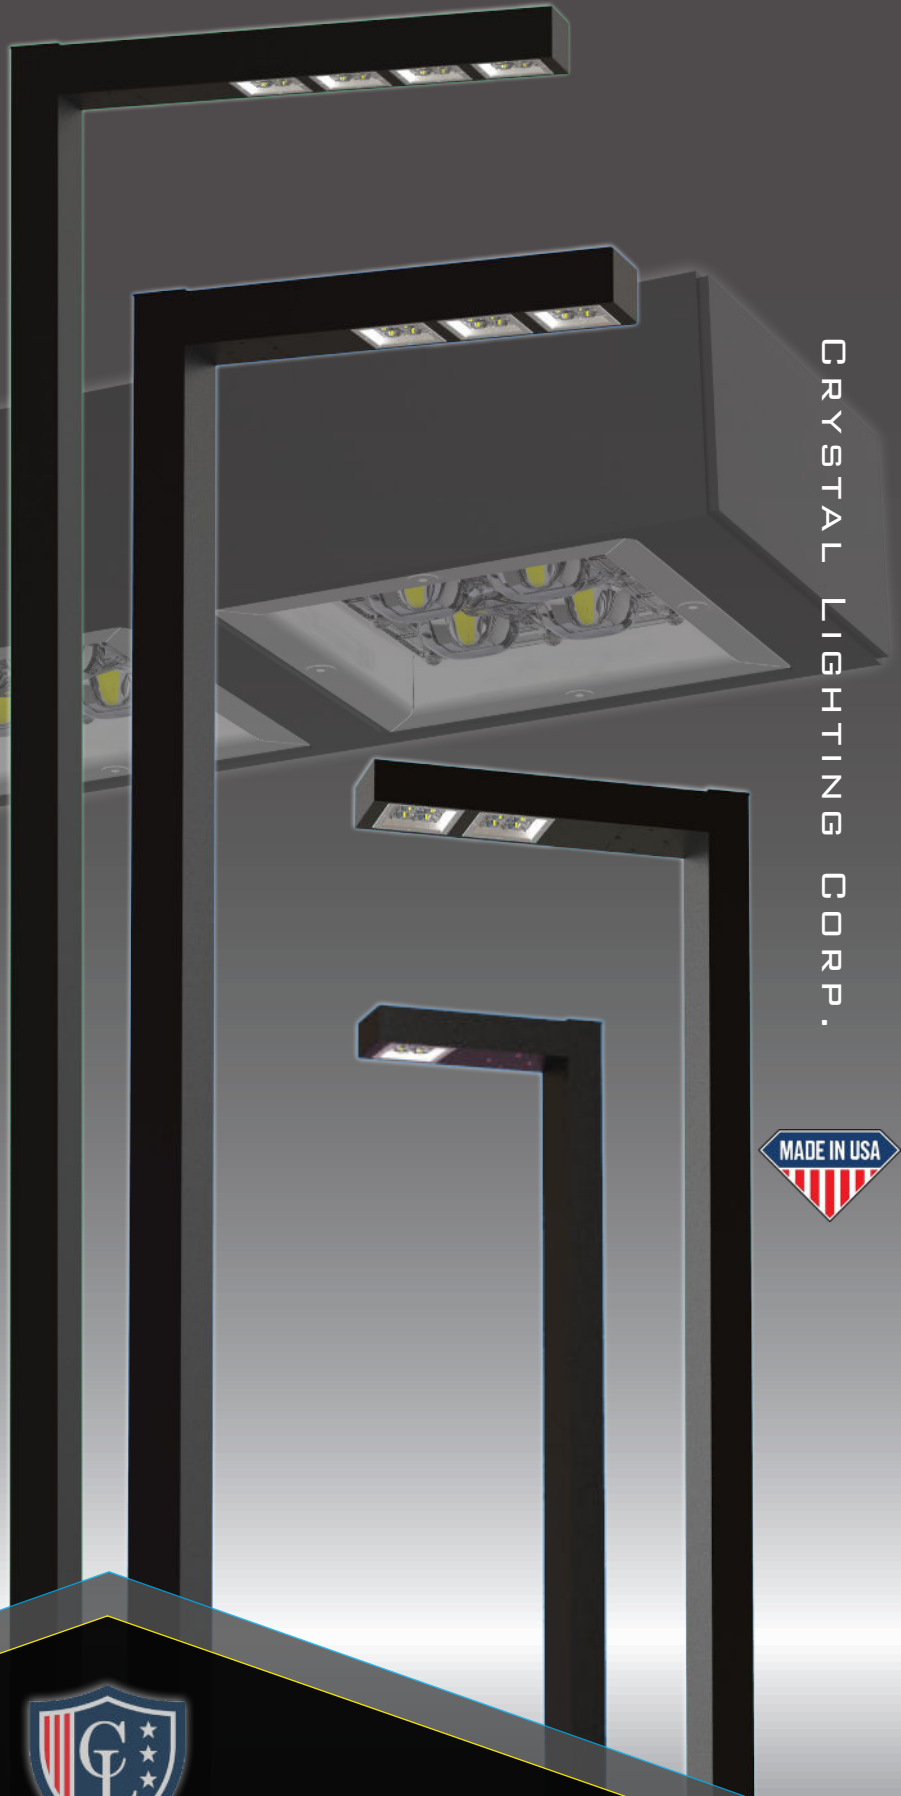



# LYNX

ARCHITECTURAL LED LIGHTING  
DESIGN-FUNCTION-QUALITY

CRYSTAL LIGHTING CORP.

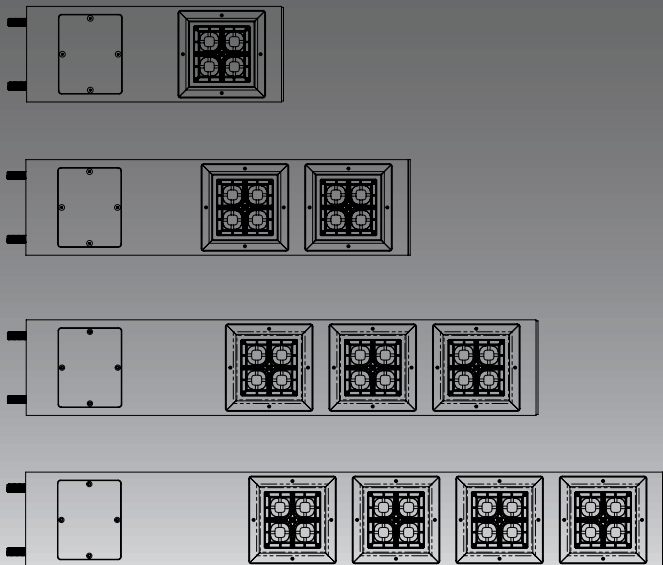

LYNX40

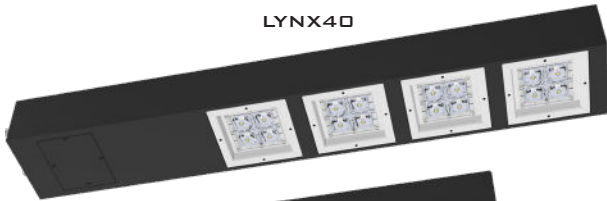

LYNX32



LYNX24



LYNX16



LYNX FAMILY, ARCHITECTURAL LED LUMINAIRE, SUITABLE FOR WET LOCATIONS. LYNX LINEAR ELEGANT DESIGN IS PERFECT FOR LIGHTING UP, RESIDENTIAL EXTERIORS, APARTMENT COMPLEX, WALKWAYS, PERIMETERS, SCHOOL CAMPUSES, INDUSTRIAL/COMMERCIAL SPACES, PARKING LOTS, RECREATIONAL PARKS.

-DARK SKY COMPLIANT

-10 YEAR /100,000 WARRANTY.


#### FEATURES:

- ENERGY SAVINGS: OVER 66% COMPARED TO HID LIGHT SOURCES.
- IMPROVED LUMEN MAINTENANCE.
- UTILIZES HIGH EFFICIENT LUMILED LED'S.
- OPERATING TEMPERATURES: -30°C ~ 60°C.
- DRIVER: CONSTANT CURRENT, 120-277V OR, 480V (OPTIONAL).
- 10KV SURGE PROTECTOR. (STANDARD).
- 0-10V DIMMING, OCCUPANCY SENSORS, PHOTO CELL OR WIRELESS CONTROLS (OPTIONAL)

#### CONSTRUCTION:

- RECTANGULAR EXTRUDED ALUMINUM.
- CORROSION RESISTANT HARDWARE.
- 3 MIL POWDER COAT FINISH.
- CLEAR OPTICS SYSTEM.
- SILICONE GASKET TO PREVENT LEAKAGE AND PROVIDE WEATHER-TIGHT PROTECTION.
- MOUNTING: POLE SIDE MOUNT, SINGLE OR DOUBLE 180° OR WALL MOUNT (OPTIONS).

#### OPTIC DISTRIBUTION

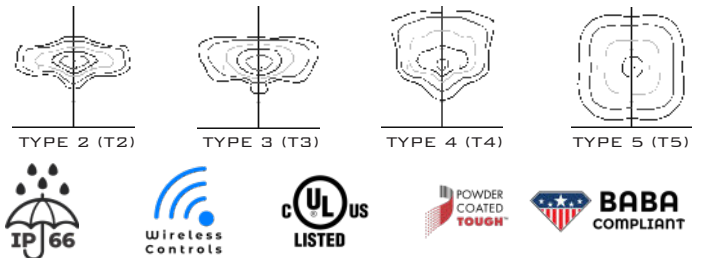


EXAMPLE: LYNX-20CLED-8-T5-50K-MV-SGL-BRZ-OCC


| CAT #                 | WATTAGE           | POLE HEIGHT    | LIGHT DIST.    | COLOR TEMP.    | VOLTAGE          | FINISH            | MOUNTING                     | OPTIONS                      |
|-----------------------|-------------------|----------------|----------------|----------------|------------------|-------------------|------------------------------|------------------------------|
| LYNX-16"L<br>(LYNX16) | 20W<br>(20CLED)   | 4"x6"x.250THK. | TYPE 2<br>(T2) | 3000K<br>(30K) | 120-277V<br>(MV) | BLACK<br>(BLK)    | SINGLE<br>(SGL)              | MOTION SENSOR<br>(OCC)       |
|                       | 40W<br>(40CLED)   | 8FT<br>(8)     | TYPE 3<br>(T3) | 4000K<br>(40K) | 480V<br>(HV)     | WHITE<br>(WHT)    | DOUBLE 180°<br>(D180)        | BUTTON PHOTO CELL<br>(B-PC)  |
|                       | 50W<br>(50CLED)   | 10FT<br>(10)   | TYPE 4<br>(T4) | 5000K<br>(50K) |                  | SILVER<br>(SLR)   |                              | WIRELESS<br>CONTROLS<br>(WC) |
|                       | 60W<br>(60CLED)   | 12FT<br>(12)   | TYPE 5<br>(T5) |                |                  | BRONZE<br>(BRZ)   | <u>PEDESTRIAN LIGHT</u>      |                              |
| LYNX-24"L<br>(LYNX24) | 70W<br>(70CLED)   |                |                |                |                  | GRAPHITE<br>(GPH) | LYNX16<br>(SPECIFIED HEIGHT) | HOUSE SIDE SHIELD<br>(HSS)   |
|                       | 80W<br>(80CLED)   | 15FT<br>(15)   |                |                |                  | CUSTOM<br>(CST)   | (LYNX16@_FT)                 |                              |
|                       | 100W<br>(100CLED) | 18FT<br>(18)   |                |                |                  |                   | LYNX24<br>(SPECIFIED HEIGHT) |                              |
|                       | 120W<br>(120CLED) |                |                |                |                  |                   | WALL MOUNT<br>(WM)           |                              |
| LYNX-32"L<br>(LYNX32) | 160W<br>(160CLED) | 20FT<br>(20)   |                |                |                  |                   |                              |                              |
|                       | 180W<br>(180CLED) |                |                |                |                  |                   |                              |                              |
| LYNX-40"L<br>(LYNX40) | 200W<br>(200CLED) |                |                |                |                  |                   |                              |                              |
|                       |                   |                |                |                |                  |                   |                              |                              |



## LYNX WM

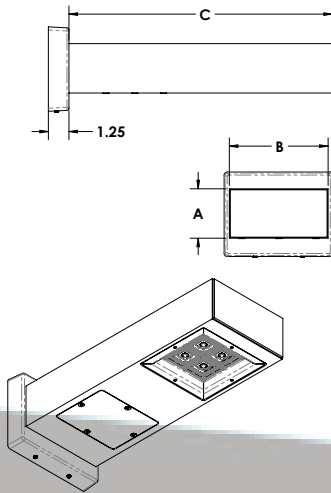

## LYNX PM

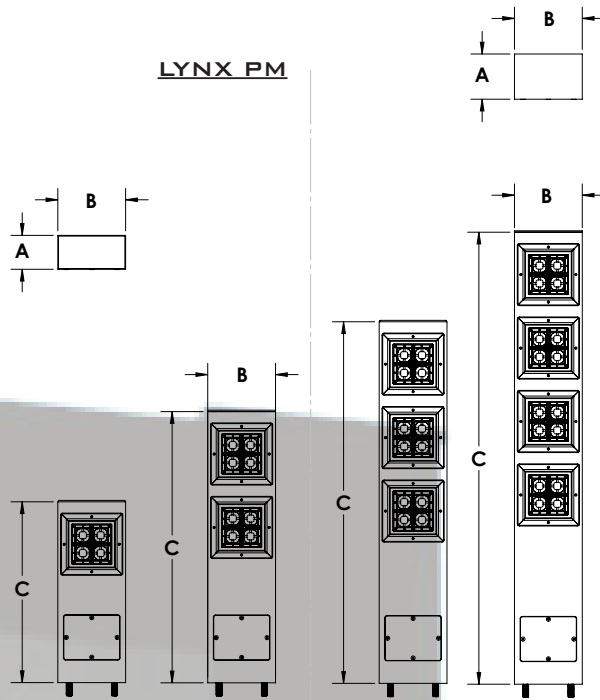

| CAT#    | A  | B  | C   | EPA | WEIGHT (LBS) |
|---------|----|----|-----|-----|--------------|
| LYNX16  | 3" | 6" | 16" | .33 | 8            |
| LYNX24  | 3" | 6" | 24" | .5  | 12           |
| LYNX32  | 4" | 6" | 32" | 1.0 | 18           |
| LYNX40  | 4" | 6" | 40" | 1.1 | 22           |
| LYNX-WM | 3" | 6" | 16" | .34 | 8            |

| CAT #                | INPUT POWER | LUMEN OUTPUT | LPW | COLOR TEMP. (CCT) | CRI | RATED LIFE (L70) | INPUT VOLTAGE | INPUT FREQUENCY | HID EQUIVALENT |
|----------------------|-------------|--------------|-----|-------------------|-----|------------------|---------------|-----------------|----------------|
| LYNX WM/16/24-20CLED | 25W         | 3036         | 151 | 3000K             | 70+ | >200,000         | 120-277V      | 50/60HZ         | 50W HPS        |
|                      |             | 3223         | 161 | 4000K             | 70+ | >200,000         | 120-277V      | 50/60HZ         |                |
|                      |             | 3223         | 161 | 5000K             | 70+ | >200,000         | 120-277V      | 50/60HZ         |                |
| LYNX WM/16/24-40CLED | 45W         | 5301         | 132 | 3000K             | 70+ | >200,000         | 120-277V      | 50/60HZ         | 150W HPS       |
|                      |             | 5628         | 140 | 4000K             | 70+ | >200,000         | 120-277V      | 50/60HZ         |                |
|                      |             | 5628         | 140 | 5000K             | 70+ | >200,000         | 120-277V      | 50/60HZ         |                |
| LYNX WM/16/24-50CLED | 55W         | 6288         | 125 | 3000K             | 70+ | >200,000         | 120-277V      | 50/60HZ         | 150W HPS       |
|                      |             | 6676         | 133 | 4000K             | 70+ | >200,000         | 120-277V      | 50/60HZ         |                |
|                      |             | 6676         | 133 | 5000K             | 70+ | >200,000         | 120-277V      | 50/60HZ         |                |
| LYNX24-80CLED        | 85W         | 10503        | 131 | 3000K             | 70+ | >200,000         | 120-277V      | 50/60HZ         | 250W MH        |
|                      |             | 11149        | 139 | 4000K             | 70+ | >200,000         | 120-277V      | 50/60HZ         |                |
|                      |             | 11149        | 139 | 5000K             | 70+ | >200,000         | 120-277V      | 50/60HZ         |                |
| LYNX24-100CLED       | 105W        | 12480        | 124 | 3000K             | 70+ | >200,000         | 120-277V      | 50/60HZ         | 400W PSMH      |
|                      |             | 13248        | 132 | 4000K             | 70+ | >200,000         | 120-277V      | 50/60HZ         |                |
|                      |             | 13248        | 132 | 5000K             | 70+ | >200,000         | 120-277V      | 50/60HZ         |                |
| LYNX32-120CLED       | 125W        | 15679        | 130 | 3000K             | 70+ | >200,000         | 120-277V      | 50/60HZ         | 400W HPS       |
|                      |             | 16645        | 138 | 4000K             | 70+ | >200,000         | 120-277V      | 50/60HZ         |                |
|                      |             | 16645        | 138 | 5000K             | 70+ | >200,000         | 120-277V      | 50/60HZ         |                |
| LYNX32-150CLED       | 155W        | 18647        | 124 | 3000K             | 70+ | >200,000         | 120-277V      | 50/60HZ         | 400W HPS       |
|                      |             | 19795        | 132 | 4000K             | 70+ | >200,000         | 120-277V      | 50/60HZ         |                |
|                      |             | 19795        | 132 | 5000K             | 70+ | >200,000         | 120-277V      | 50/60HZ         |                |
| LYNX40-180CLED       | 185W        | 22900        | 127 | 3000K             | 70+ | >200,000         | 120-277V      | 50/60HZ         | 750W MH        |
|                      |             | 24310        | 135 | 4000K             | 70+ | >200,000         | 120-277V      | 50/60HZ         |                |
|                      |             | 24310        | 135 | 5000K             | 70+ | >200,000         | 120-277V      | 50/60HZ         |                |
| LYNX40-200CLED       | 205W        | 24862        | 124 | 3000K             | 70+ | >200,000         | 120-277V      | 50/60HZ         | 750W PS        |
|                      |             | 26393        | 132 | 4000K             | 70+ | >200,000         | 120-277V      | 50/60HZ         |                |
|                      |             | 26393        | 132 | 5000K             | 70+ | >200,000         | 120-277V      | 50/60HZ         |                |



PROUDLY DESIGN, MANUFACTURED AND ASSEMBLED IN THE USA