



LED Balloon Light

DESCRIPTION

When it comes to lighting a large area, this product is the ideal solution for high impact lighting of mine-haul road intersections, road works, construction sites, events and general industrial and maintenance programs.

PRODUCT FEATURES

- Type of installation: Hanging Installation / Mobile Stand Installation
- Colour handle: Black
- Power supply cable:
US PLUG: SJTW 3x0.824mm²(18AWG) 105°C 300V/5M (16.40ft)
EU PLUG: H05RN-F 300V/500V 3G1.0mm²/5M (16.40ft)
AU PLUG: H05RN-F 300V/500V 3G1.0mm²/5M (16.40ft)
- Lamp cover: opal
- Glow wire test: 850°C - 30 seconds
- Bracket: 2M / 6.56FT

ELECTRICAL

- Wattage: 80W/120W/220W
- Voltage: 100-277VAC 50/60Hz
- THD: <20%
- Efficacy: 125LM/W
- Color Temperature: 2700-6500K
- CRI: >80Ra
- Working Temp: -40°F to 122°F (-40°C to 50°C)
- IP Rating: Ip65
- Impact Protection: Ik08 (5 Joule)
- Lifespan: 50000 Hrs.




APPLICATION


Temporary work sites such as docks, warehouses, car repairs, loading platforms, fishing boats, construction sites, railway maintenance, and construction tunnels.

DIMENSIONS

Model	H	D	Φ
YL-WL10-80W-M-XXK	360mm/ 14.17in	265mm/ 10.43in	250mm/ 9.84in
YL-WL10-120W-M-XXK	560mm/ 22.05in	265mm/ 10.43in	250mm/ 9.84in
YL-WL10-220W-M-XXK	820mm/ 32.28in	265mm/ 10.43in	250mm/ 9.84in

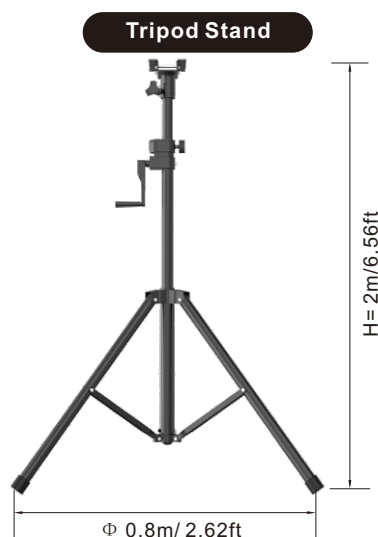

Maximum Expansion Diameter (Φ): 0.8m/2.62ft
Weight 5.76Kg(13lbs)

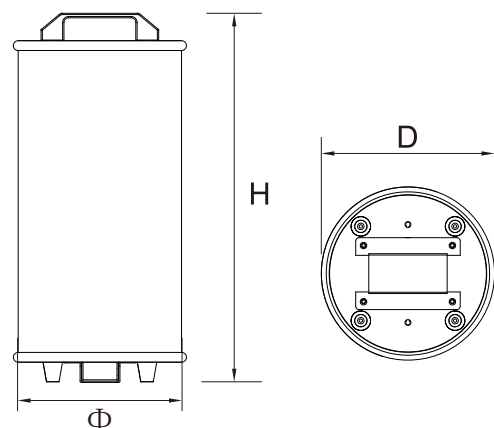



LED Balloon Light

SPECIFICATIONS

MODEL#	WATTAGES	INPUT VOLTAGE	CCT	LUMENS	DIMENSIONS	PF	CERTIFICATE
YL-WL10-80W-M-XXK	80W	100-277VAC	2700-6500K	10,000LM	360*265mm/14.17x10.43in	≥ 0.9	ETL/CE
YL-WL10-120W-M-XXK	120W	100-277VAC	2700-6500K	15,000LM	560*265mm/22.05x10.43in	≥ 0.9	ETL/CE
YL-WL10-220W-M-XXK	220W	100-277VAC	2700-6500K	27,500LM	820*265mm/32.28x10.43in	≥ 0.9	ETL/CE



BRAND#	CATEGORY	WATTAGES	INPUT VOLTAGE	CCT
YL	- WI10	- 220W	- M=100-277VAC	- XXK=65K(6500K)

ACCESSORIES LIST



Handbag



Hang buckle



Tripod stand



Carrying case

Optional