

FFS / FFD SERIES



CIII

CID2

CIID2



Product Specification

Model: FFS Series

Power: 20W / 40W / 50W / 60W / 70W / 80W

Warranty: 5 Year

Lumens: 3000-12000 lm

Efficacy: Up to 150 lm/W

Rating: IP 66, IK10

Certification: Class I Division 2, Groups A, B, C and D;

Class II Division 2, Groups F, G, Class III

Operating Temp: -40°F – +149°F (-40°C – +65°C)

Voltage: 100–277VAC / 200–480VAC

CRI: 70 and 80



Rated Life: L70 >100,000 hours

Lens: Tempered Glass, PC

Beam Angle: 25° / 60° / 90° / 110°

Mounting Option: Pendant / Yoke / Ceiling / Stanchion / Wall / Pole

Emergency: For 90 minutes

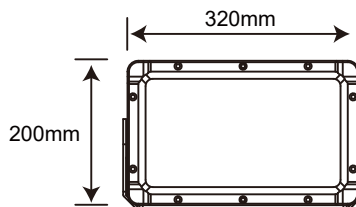

Product Specification

Model: FFD Series

Power: 100W / 120W / 130W / 150W / 160W / 180W / 200W

Warranty: 5 Year

Lumens: 15000-30000 lm

Efficacy: Up to 150 lm/W

Rating: IP 66, IK10

Certification: Class I Division 2, Groups A, B, C and D;

Class II Division 2, Groups F, G, Class III

Operating Temp: -40°F – +149°F (-40°C – +65°C)

Voltage: 100–277VAC / 200–480VAC

CRI: 70 and 80

Rated Life: L70 >100,000 hours

Lens: Tempered Glass, PC

Beam Angle: 25° / 60° / 90° / 110°

Mounting Option: Pendant / Yoke / Ceiling / Stanchion / Wall / Pole

Emergency: For 90 minutes

