

LED Vapor Tight

Industrial Series



DESCRIPTION

Designed for tough environments, our LED Vapor Tight fixture delivers reliable, high-performance lighting with a clean, modern look.

It features an easy-to-install mounting bracket for quick and secure installation, and an internal aluminum plate that ensures efficient heat dissipation to extend the life of the fixture. The IP67 rating offers complete protection against dust and water, making it ideal for wet, damp, and dusty locations.

A frosted impact-resistant polycarbonate lens reduces glare for more comfortable illumination, while the white finish provides a sleek, professional appearance suitable for a wide range of applications—from industrial facilities to parking garages and utility rooms.

FEATURES

- IK10 Rated Lens
- Internal Aluminum Heat Dissipation Plate
- Fire-Rated Polycarbonate Housing
- 0-10V Dim to Off
- Easy-to-install Mounting Bracket

MARKETS

- Freezers / Coolers
- Toll Booths
- Parking Garage
- Security Lighting
- Alleyways
- Tunnels

CERTIFICATIONS



LED Vapor Tight

Industrial Series

SPECIFICATIONS

PERFORMANCE

Efficacy (LPW): 130
CRI: 80
Operating Temp: -22 °F to 131 °F (-30 °C to 55 °C)

LIFESPAN

Life (@L70): 85,000 hours
Warranty: 5 years

PHYSICAL

Color: White
Housing: Polycarbonate

ELECTRICAL

Input Voltage: 120-277V (277-480V Optional)
Input Frequency: 50/60Hz
PF: ≥.95
THD: ≤ 13%
Surge Protection: 4KA
Dimming: 0-10V
Minimum Dimming: Dim to Off
Aux. Voltage: 12VDC
Driver Class: Class P
Whip/Cord: 2.5 ft
Sensor: N/A

OPTICAL

Standard Lens: Frosted
Lens Material: UV-Resistant Polycarbonate
Fireproof Rating: V0

MOUNTING

Easy-to-install Bracket for Flush Mount

INDUSTRY STANDARDS/RATINGS


IP Rating: IP67
IK Rating: IK08
Location: Wet
Outdoor Rated: Yes
UL/ETL: UL
DLC: 5.1
FCC: Yes
RoHS: Yes
CE: Yes

SKU	Wattage	Current Draw	Lumens
U-VT4-40	40W	0.34A@120V 0.15A@277V 0.09A@480V	5,200
U-VT4-60	60W	0.5A@120V 0.22A@277V 0.13A@480V	7,800

LED Vapor Tight

Industrial Series

DIMENSIONS / WEIGHT

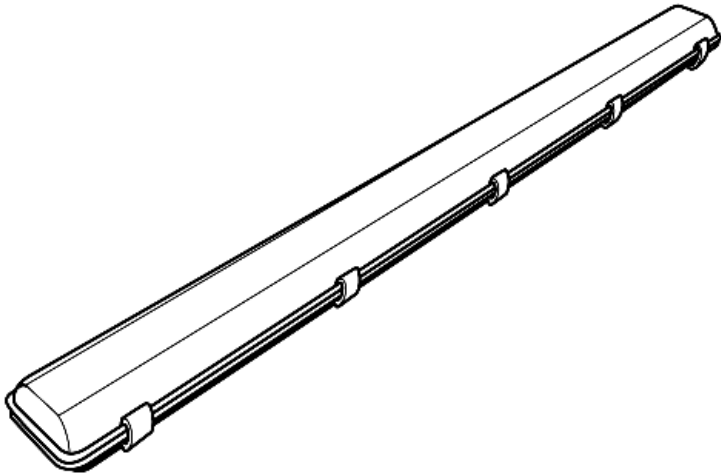

Length	Width	Height	Weight
48"	5.8"	4.2"	5.3 lbs

ORDERING INFORMATION

U - VT4 - Wattage - CCT

U	VT4	40W 60W	30
			35
			40
			45
			50
			57

Example: U-VT4-60-50 (60W VT4 Model with 5000K Color Temperature)

Note: 4000K and 5000K are stocked locally.

LED Vapor Tight

Industrial Series

ACCESSORIES



BACKUP BATTERY OPTIONS

U-EI-8-C	8W Emergency Inverter
U-EI-15-C	15W Emergency Inverter
U-EI-20-C	20W Emergency Inverter

HIGH VOLTAGE INPUT OPTIONS

U-BD-150W-480V	277-480V ($\leq 150W$) Driver Swap
----------------	--------------------------------------