


300W LED Retrofitting Kit



This LED Retrofitting kit is tailored to replace MH HPS HID CFL lamp etc., for high bay lighting. high mast lighting, parking lot pole lighting fixtures.



Dimension

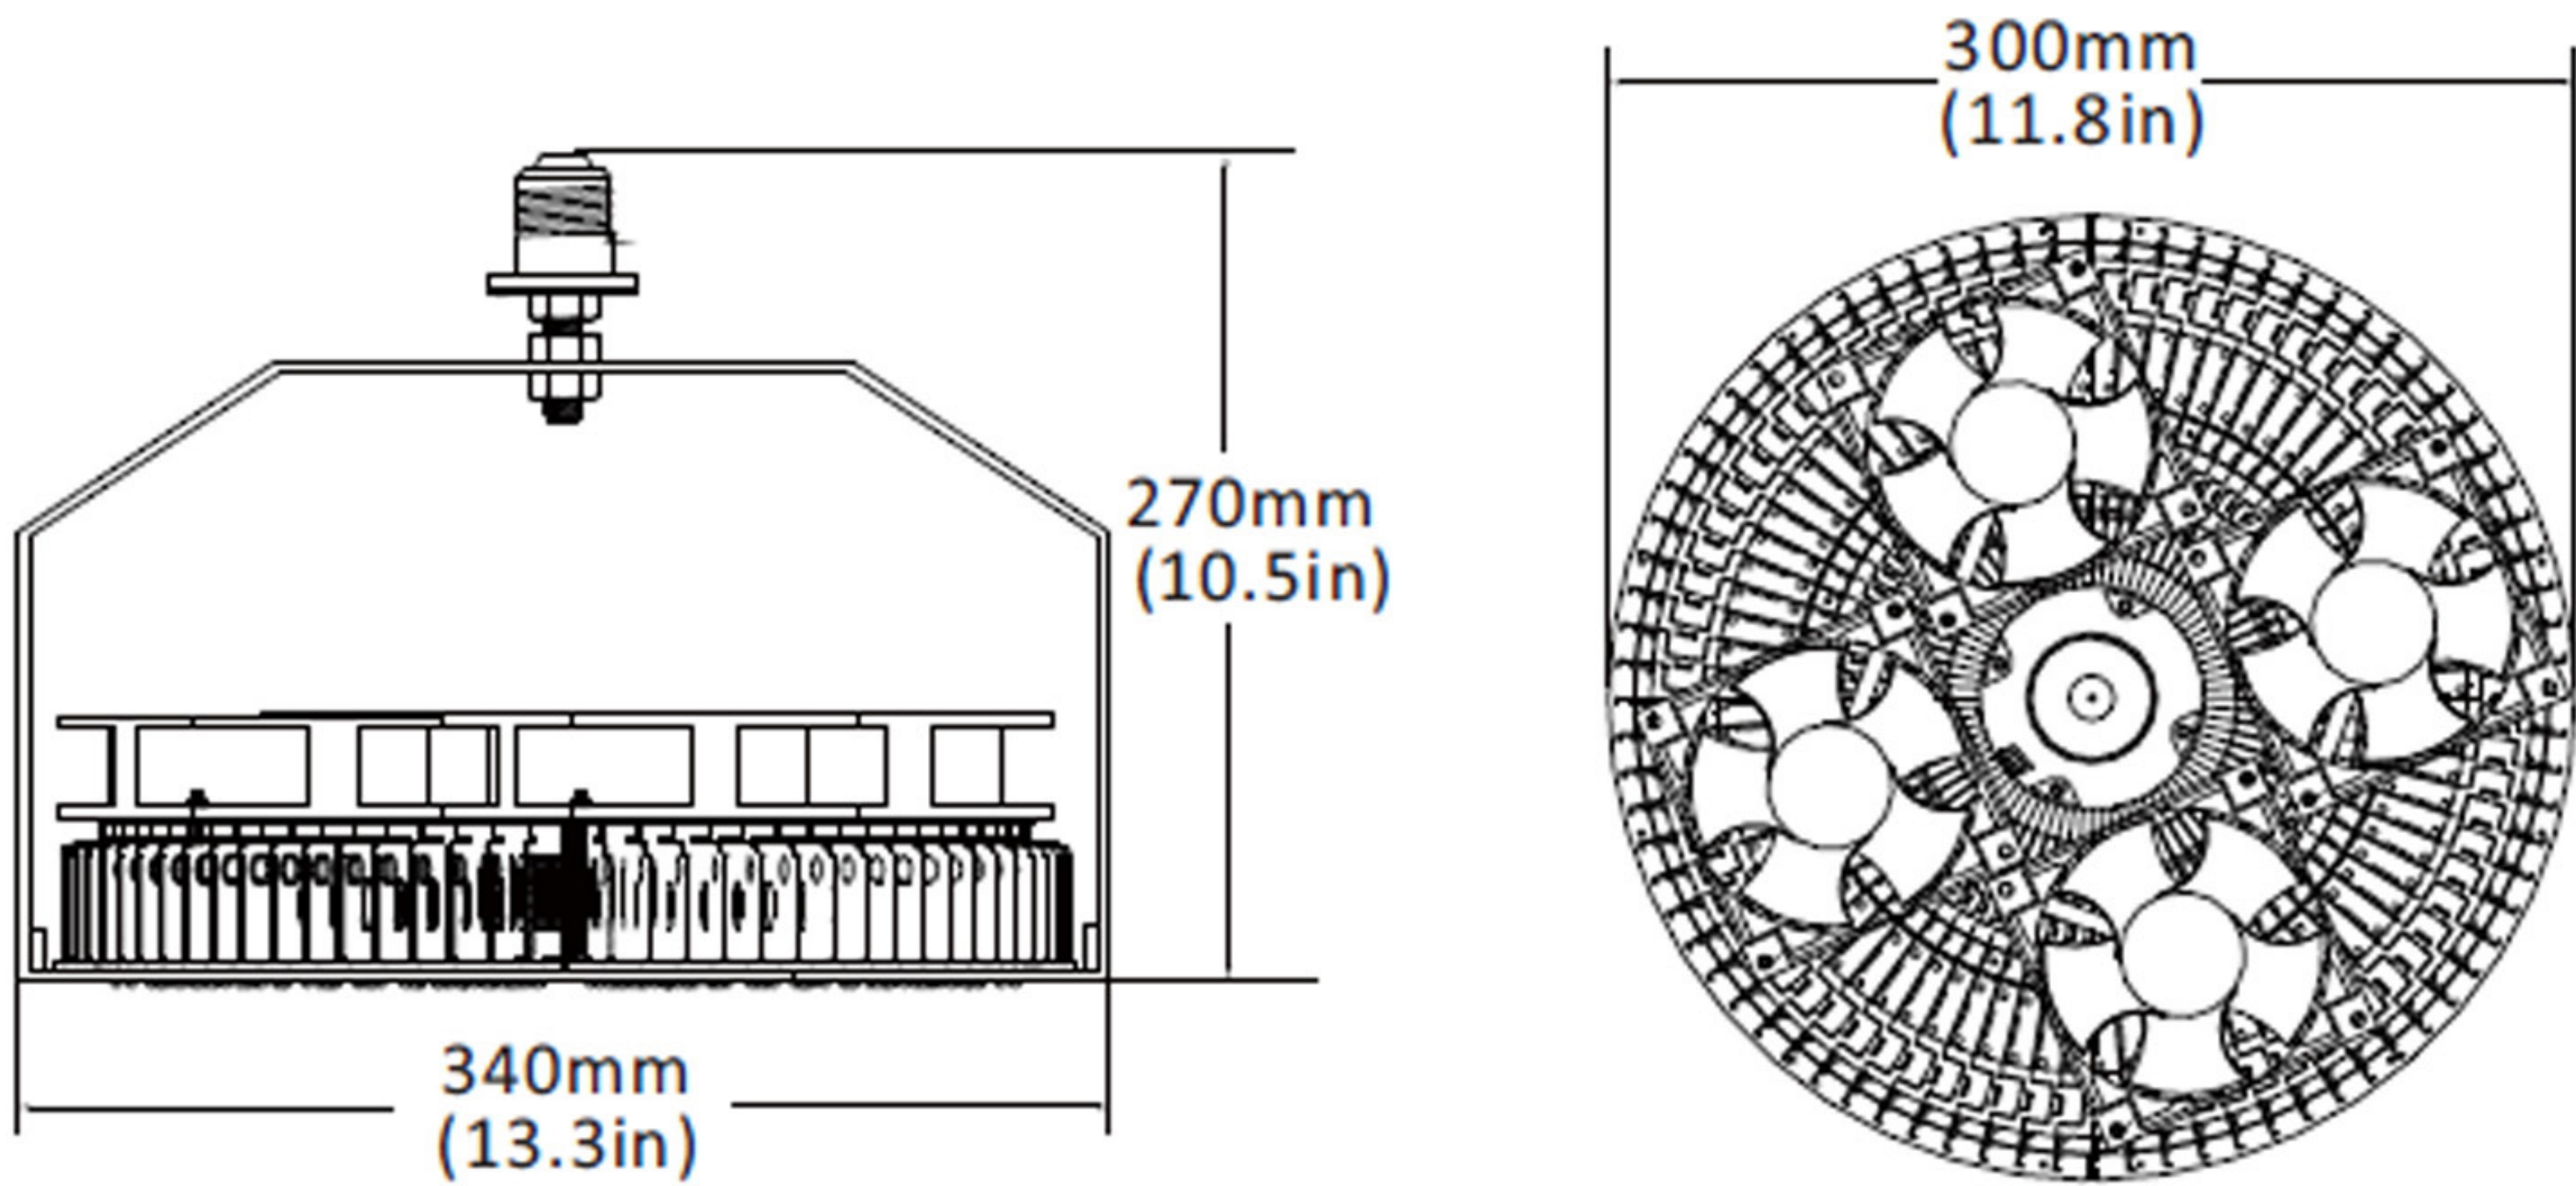

We can customize a bracket cater to different installation needs



Specification data

Item No.	Rated Watt	Input Volt	Power Factor	CRI	Replacement	Luminous Flux
RK-300W-E39	300W	100-277VAC	PF>0.95	Ra>80	1000W-1200W MH HPS HID	32000LM
RK-300WHV-E39	300W	347-480VAC	PF>0.95	Ra>80	1000W-1200W MH HPS HID	32000LM

- Color temperature: warm white(2700k-3800k),natural white (4000k-5000k),cool white(5500k-6700k).
- Life time: over 50,000 hours.
- Warranty: 5 years factory warranty.



Applications

This LED bulb can be applied for all different shoebox lighting fixture, highmast lighting fixture, high bay fixtures to replace MH HPS HID lamp up to 1000w.(including enclosed applications)



Please remove any ballast or capacitor parts before doing the retrofiting.