



## illumination

- Adjustable long lasting, efficient ultra-bright white LED lamp heads which provides optimal center-to center spacing.
- 2 X 1.2W lamp head(12X0.1W white LEDs),200 lumen output.
- High performance chrome-plated metallizde reflector and plastic lens for optimal light distribution.
- Long-lasting, energy efficient Red or Green LED exit sign illumination.

## Electrical

- 120V-277VAC input.
- Charge rate/power"ON"LED indicator light and push-to-test switch for mandated code compliance testing.
- Built-in 9.6V 1000mAH long-life, maintenance-free, rechargeable Ni-Cad battery for standard models. 9.6V 2000mAH long-life, maintenance-free, rechargeable Ni-Cad battery for models with remote heads.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Test switch and charge indicator.
- UL924 listed

## Mounting

- EZ-snap mounting canopy included for top or end mount.
- Universal J-box mounting pattern.

## Housing



- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic.
- UL 94v-0 flame rating.
- White or Black finish. SALIDA faceplate available.

## Options

- Remote capacity option available.
  - Remote load capability is up to 2W, compatible with two 1-lamp remote heads or one 2-lamp remote head (RH01 Series)
  - Single or double face (Universal).\* SALIDA faceplate available.
- \*One faceplate pre-installed.The other one comes as optional in the packing.*

## Warranty/Listing

- Five year warranty on all electronics and housing. Batteries 3 years.
- UL listed for damp locations (0° -40°C)

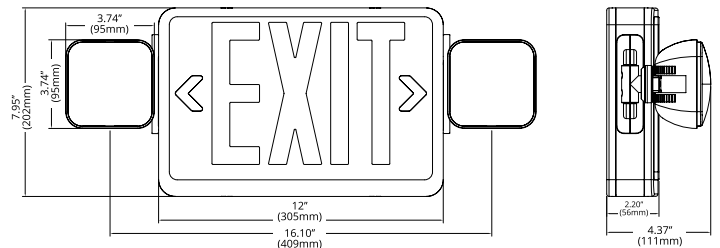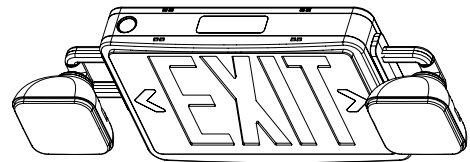

## Certifications and Compatibilities



## Order Format

**Example: ESC03-G1-WH**

Series	Letter Color	Letter Type	Voltage	Finish Color	Other Options
ESC03	G=Green R=Red*	1=Exit 2=Salida**	Blank=120-277V	WH=White* BL=Black	Blank RC=With Remote Load***

\* Red letter and white finish comes as default. Contact sales for extra lead time on green letter or black finish.

\*\* SALIDA faceplate comes as optional accessory.

\*\*\* Remote load comes as default (RH01 Series)