



Illumination

- Adjustable long lasting, efficient ultra-bright white LED lamp heads.
- 2 X 1W white LED per lamp head.180 lumen output.
- Unique all inclusive lamp, reflector and lens assembly.
- Long-lasting, energy efficient Red or Green LED exit sign illumination.

Electrical

- 120V-277VAC universal input voltage.
- Test switch and charge indicator.
- Built-in 3.6V 1000mAH long-life, maintenance-free, rechargeable
- Ni-Mh battery for standard models. 3.6V 2000mAH long-life, maintenance-free, rechargeable Ni-Mh battery for models with remote heads.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Certifications and Compatibilities



Project Details

Project Details	Type
Project:	
Product:	
Prepared by:	
Notes:	

Mounting

- EZ-snap mounting canopy included for top or end mount.
- Universal J-Box mounting pattern.

Housing


- Injection-molded thermoplastic ABS and PC housing.
- UL 94v-0 flame rating.
- White or Black finish. SALIDA faceplate available.

Options

- Remote capacity option available.
 - Remote load capability is up to 2W, compatible with two 1-lamp remote heads or one 2-lamp remote head (RH01 Series).
 - Single or double face (Universal). *SALIDA faceplate available.
- *One faceplate pre-installed.The other one comes as optional in the packing.*

Warranty/Listing

- Five year warranty on all electronics and housing.
- Batteries 3 years.
- Meets UL924.
- UL listed for damp locations (0° -40°C)

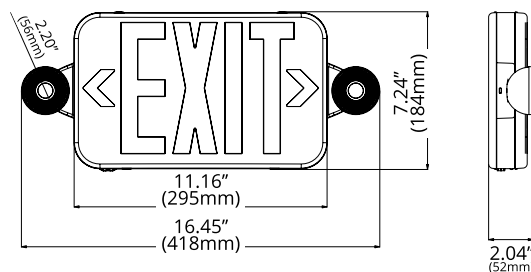

Order Format

Example: ESC02-G1-WH

Series	Letter Color	Letter Type	Voltage	Finish Color	Other Options
ESC02	G=Green R=Red*	1=Exit 2=Salida**	Blank=120-277V	WH=White BL=Black**	Blank RC=With Remote Load***

* Red letter and white finish comes as default. Contact sales for extra lead time on green letter or black finish.

** SALIDA faceplate comes as optional accessory.

*** Remote load comes as default.