



### Description

The Waterproof UFO High Bay is the most versatile fixture that we have produced to date. With an IP67 rating, and capable of mounting on the ground and wall, the UHBHO/UHB can do it all.



Not all product variations listed on this page are DLC Premium qualified. To ensure that a specific model is qualified, visit [www.designlights.org/search](http://www.designlights.org/search)

### Applications

Warehouse Lighting  
Shopping Centers

Cold Storage  
Indoor Arenas

Exhibit Halls  
Gymnasiums

### Specs

Efficacy 165 lm/W  
Input Voltage 100-277V  
Finish Black

### Details

IP Rating IP67  
Material Die Cast Aluminum  
Lens Frosted Tempered Glass  
L70 Life 150,000 Hours  
Warranty 5 years  
CRI 80+  
Qualification UL, DLC Prem./5.1, FCC, CE, RoHS  
Chip Man. Philips  
Whip Length(ft) 4'

### Electrical

Power Factor 0.99  
Frequency 50/60 Hz  
Max THD 15%  
Operating Temp. -22° F to 113° F  
-30° C to 45° C  
Dimming 3 in 1 (Resistance, PWM, 1-10V)

LED HIGH BAY WATERPROOF UFO

### Ordering Information


| ORDERING/DLC #: | Wattage | CCT   | Lumens    | Equivalent |
|-----------------|---------|-------|-----------|------------|
| U-UHBHO-100-30  | 100W    | 3000K | 15,320 lm | 500W MH    |
| U-UHBHO-100-40  | 100W    | 4000K | 15,900 lm | 500W MH    |
| U-UHBHO-100-50  | 100W    | 5000K | 16,300 lm | 500W MH    |
| U-UHBHO-150-30  | 150W    | 3000K | 23,560 lm | 1000W MH   |
| U-UHBHO-150-40  | 150W    | 4000K | 24,168 lm | 1000W MH   |
| U-UHBHO-150-50  | 150W    | 5000K | 24,776 lm | 1000W MH   |
| U-UHBHO-240-30  | 240W    | 3000K | 37,200 lm | 1500W MH   |
| U-UHBHO-240-40  | 240W    | 4000K | 38,160 lm | 1500W MH   |
| U-UHBHO-240-50  | 240W    | 5000K | 39,120 lm | 1500W MH   |
| U-UHB-320W-30-D | 320W    | 3000K | 51,818 lm | 2000W MH   |
| U-UHB-320W-40-D | 320W    | 4000K | 52,480 lm | 2000W MH   |
| U-UHB-320W-50-D | 320W    | 5000K | 54,400 lm | 2000W MH   |

### Additional Notes

- 4000K and 5000K, 100-277V are stocked locally, check for ETA's
- LightingX Corp. reserves the right to make periodic improvements to our product specs



## Fixture Dimensions and Weight

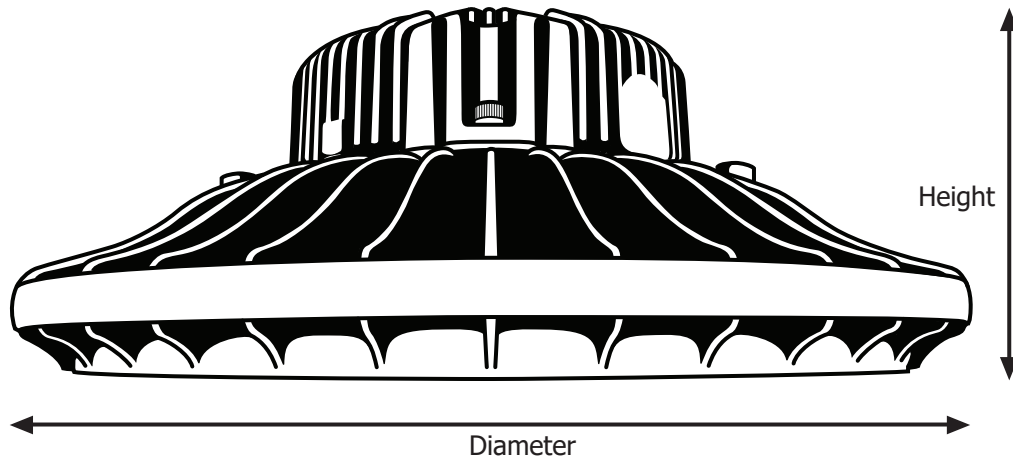

| Fixture Wattage | Diameter | Height  | Weight             |
|-----------------|----------|---------|--------------------|
| 100W and 150W   | 13.2 in. | 6.7 in. | 11.7 lb., 12.6 lb. |
|                 | 335 mm.  | 170 mm. | 5.3 kg., 5.7 kg.   |

Weight for 100W and 150W respectively.

| Fixture Wattage | Diameter | Height  | Weight             |
|-----------------|----------|---------|--------------------|
| 240W and 320W   | 17 in.   | 6.7 in. | 19.8 lb., 21.6 lb. |
|                 | 505 mm.  | 190 mm. | 8.9 kg., 9.8 kg.   |

Weight for 240W and 320W respectively.

## Accessories and Options

1. U-EI-HB-40-C - 40W Emergency Inverter (for All High Bays)
2. U-MH-PM-HB - Pendant mount with wiring slot
3. U-UHBHO-YBR - Mounting Yoke Bracket for UFO LED High Bay Lights
4. U-UHB-CPL - Clear Polycarbonate Lens for UFO
5. U-UHB-FPL - Frosted Polycarbonate Lens for UFO