

LED Bollard Light

U-BOL-25W



Applications

Courtyards Lawns Walkways
Roadways

Product Details

- Provides high quality ambient lighting
- Excellent efficacy of 130 lm/W
- Water-resistant die-cast aluminum housing
- Easy Installation

Spec Summary

Wattage 25W
Input Voltage AC 120 - 277V
CCT 4000K/ 5000K
Light Source SMD 2835 LEDs
Driver WELED Power

Description

The LED Bollard Lighting Series can be widely used for Outdoor spaces. Easy to install and provides high quality ambient lighting, the LED Bollard Series is an excellent option for Lawns, Courtyards, Roadways and many other outdoor applications.



LED Bollard Light

DLC Listing: BL25W27

Product	Power	Voltage	ColorTemp	FINISH
BL LED Bollard Light	25W (25W)	27 AC120-277V	40K (4000K) 50K (5000K) ± 500K	D (Dark Bronze) W (White) B (Black) S (Silvery)


TECHNICAL PARAMETERS:

DLC Listing: BL25W27			
Power	25W	Lighting Angle	141°
Input Voltage	AC120-277V	LED Brightness Decay	<5%/6000 hrs
PF	≥ 0.90	Working Life	>75000 hrs
Driver Efficiency	≥ 87%	Working Temperature	-30 - +45°C
Luminous Flux	3360 Lm	Storage Temperature	-40 -+80°C
Color Temperature	4000K/5000K	Protection Level	Wet Location
CRI	Ra>70	Cable	3core,18AWG (0.3m)



LED Bollard Light

U-BOL-25W

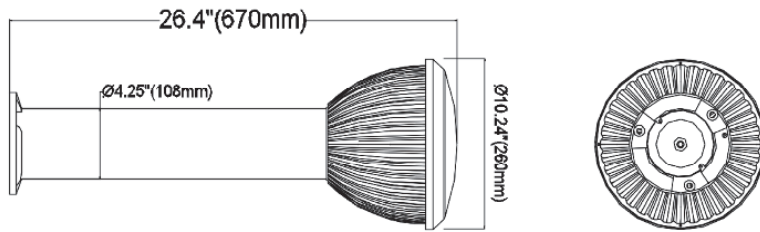

Structure Features:

- Shell Materials: Aluminum & PC
- Finish: Dark Bronze/White/black(Optional)
- Net Weight: 2.76KG (6.08LBS)
- **Product Size: 670mmX260mmX108mm**
26.4"X10.24"X4.25"
- **Carton Size: 690mmX270mmX270mm**
27.2"X10.6"X10.6"

LED Bollard Light

PHOTOMETRY:

